


FLEXTRAY

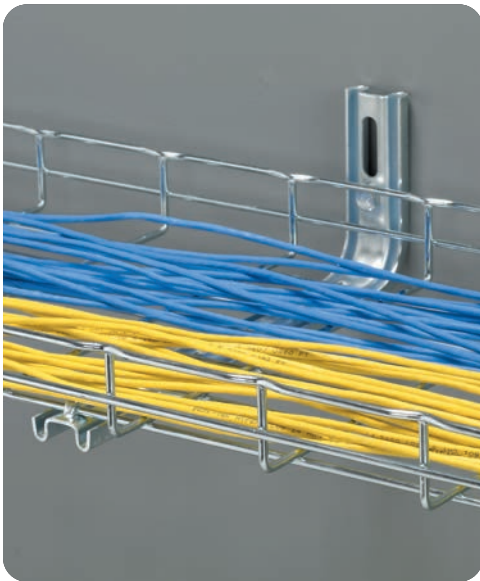

FLEXTRAY

Flextray is a flexible, field-adaptable way to manage cables throughout your project. The tray itself can be cut and bent to the needs of the installer on the jobsite, allowing cable runs to be adjusted as needed. The wide range of sizes offered by B-Line makes Flextray a great choice for everything from a small cable drop to a large trunk of cables. Our tray has the market-preferred "T" weld safety edge, protecting both the cable and the installer during cable installation. Flextray is also UL Classified as an equipment grounding conductor.

The F.A.S.T.™ System is Foldable, Adjustable, Stackable, and Tool-less, providing many options to manage cables inside your raised floor space. With only a few parts, you can create everything from a basic single layer installation to a cantilevered, multiple-tier cable run. Make the most of your raised floor space and your time with the F.A.S.T. System!

Finish Information

Flextray Cable Tray and Accessories are available in a wide variety of finishes to meet the environmental or aesthetic requirements of customer installations. Use the list below to find the finish and suffix that will meet your needs.

Available product finishes will be listed on individual pages throughout the catalog.

Finish codes shown in bold type are the standard for that product.

Plain wire: ASTM A510, Grade 1008

- EG** Electroplated Zinc Galvanized Finish applied after fabrication
(ELG) Recommended applications: Controlled interior
UL/CSA Classified as an equipment ground conductor when spliced as recommended
ASTM B633 - Average thickness of 0.3 mils (8 microns)
- GS** Pre-Galvanized Zinc Finish applied before fabrication
(GLV) Recommended applications: Limited industrial & interior
UL/CSA Classified as an equipment ground conductor when spliced as recommended
ASTM A641
- BLE** Black Powder Coat Finish applied after fabrication
Recommended applications: Controlled interior
UL/CSA Classified as an equipment ground conductor when coating has been removed at splice contact points
Average paint thickness of 1.2 mils (30 microns) to 3.0 mils (75 microns)
- HD** Hot Dip Galvanized Finish applied after fabrication
(HDG) Recommended applications: Exterior, corrosive. Not intended for clean room applications.
UL/CSA Classified as an equipment ground conductor when spliced as recommended
ASTM A123 - Average thickness of 2.4 mils (60 microns) to 3.2 mils (80 microns)
- 304S** 304L Stainless Steel
(SS4) Recommended applications: Food preparation, wash-down areas
ASTM A580
- 316S** 316L Stainless Steel
(SS6) Recommended applications: Highly corrosive applications & marine environments
ASTM A580
- Custom Powder Coat Finish applied after fabrication
Recommended applications: Controlled interior
UL/CSA Classified as an equipment ground conductor when coating has been removed at splice contact points
No Specification

Grounding Information

Statement for all UL Classified products:



This product is classified by Underwriters Laboratories, Inc. as to its suitability as an equipment grounding conductor only. 556E



Most sizes of FLEXTRAY are UL Classified to serve as an Equipment Ground Conductor. The ground path can be achieved in one of two ways listed on page FLX-4:

Grounding Information (cont.)

1. Use the recommended quantity of UL Classified splices to connect sections and at places where the tray is cut.
2. Run an appropriately sized ground wire alongside the tray and attach it to each tray section and on both sides of a cut in the tray. (This method is recommended by NEMA VE-2 Installation Manual.)

Load & Fill Chart

FLEXTRAY Series Part Number	Size height x width	Support Span / Loading Capacity*				Cable Fill (50% fill)**		
		Lbs/Ft (max)				Actual Area Inside Tray (in ²)	Number of CAT 5e Cables***	Number of CAT 6 Cables***
		5'-0"	6'-0"	7'-0"	8'-0"			
FT1.5X12	1 1/2" x 12"	29	17	14	11	12.2	176	124
FT2X2	2" x 2"	34	28	24	20	4.3	61	43
FT2X4	2" x 4"	52	43	35	27	8.2	118	83
FT2X6	2" x 6"	66	47	35	27	12.1	175	123
FT2X8	2" x 8"	66	47	35	27	16.1	231	163
FT2X12	2" x 12"	68	47	35	27	23.9	345	243
FT2X16	2" x 16"	68	47	35	27	31.8	459	324
FT2X18	2" x 18"	68	47	35	27	35.8	516	364
FT2X20	2" x 20"	68	47	35	27	39.7	573	404
FT2X24	2" x 24"	68	47	35	27	47.5	686	484
FT2X30	2" x 30"	68	47	35	27	59.8	862	608
FT2X32	2" x 32"	77	53	39	30	63.3	914	645
FT4X4	4" x 4"	58	49	42	36	15.8	227	160
FT4X6	4" x 6"	93	77	60	46	23.6	341	240
FT4X8	4" x 8"	94	78	61	47	31.5	454	321
FT4X12	4" x 12"	119	83	61	47	47.5	686	484
FT4X16	4" x 16"	119	83	61	47	63.5	917	647
FT4X18	4" x 18"	119	83	61	47	71.5	1032	728
FT4X20	4" x 20"	119	83	61	47	79.5	1148	810
FT4X24	4" x 24"	128	89	65	50	95.5	1379	973
FT4X30	4" x 30"	128	89	65	50	119.5	1725	1217
FT6X8	6" x 8"	111	77	57	43	47.3	682	481
FT6X12	6" x 12"	124	86	63	48	71.6	1034	729
FT6X16	6" x 16"	128	89	65	50	95.3	1375	970
FT6X18	6" x 18"	128	89	65	50	107.3	1549	1092
FT6X20	6" x 20"	141	98	72	55	118.9	1716	1211
FT6X24	6" x 24"	154	107	78	60	143.3	2068	1459


* Published load chart has not been tested with Flexmate splice. Please consult the factory for load information when using the Flexmate option.

** FLEXTRAY fill capacity is based on NEC allowable fill of 50%. The NEC rule requires that the cable cross-sectional areas together may not exceed 50% of the tray area (width x depth = fill). Cables will nearly completely fill the cable tray when reaching the 50% cable fill, due to empty space between the surface of the cables. TIA recommends 40% fill ratio. Flextray loads shown in the loading chart will not be exceeded at 50% fill.


*** CAT 5e 4-pr non-plenum approximated at .21 in. diameter, CAT 6 4-pr non-plenum approximated at .25 in. diameter. Actual diameters vary by cable manufacturer.

FLEXTRAY™ - Straight Sections

1.5" Deep FLEXTRAY





Height: 1.38" (35 mm)
Length: 118.312" (3 meter)
Wire Dia. Minimum: .196" (5.0 mm)
Finishes:
EG, GS, BLE, HD, 304S, 316S




Part Number	Width		Wt. Per Pc.	
	in.	mm	lbs.	kg
FT1.5X4X10	4	100	5.8	2.63
FT1.5X6X10	6	150	7.4	3.35
FT1.5X8X10	8	200	9.0	4.08
FT1.5X12X10	12	300	12.1	5.49

Only FT1.5X12 (12" wide) is UL Classified

2" Deep FLEXTRAY



Height: 2.38" (60 mm)
Length: 118.312" (3 meter)
Wire Dia. Minimum: .196" (5.0 mm)
Finishes:
EG, GS, BLE, HD, 304S, 316S

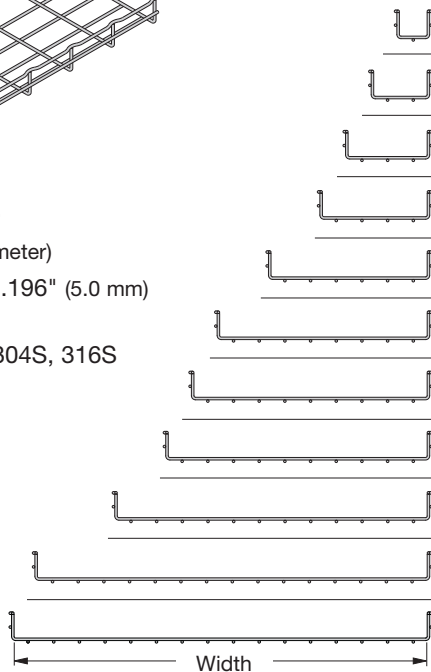


Part Number	Width		Wt. Per Pc.	
	in.	mm	lbs.	kg
FT2X2X10	2	50	6.6	2.99
FT2X4X10	4	100	8.2	3.72
FT2X6X10	6	150	9.7	4.40
FT2X8X10	8	200	11.2	5.08
FT2X12X10	12	300	14.3	6.48
FT2X16X10	16	400	17.4	7.89
FT2X18X10	18	450	18.9	8.57
FT2X20X10	20	500	20.4	9.25
FT2X24X10	24	600	23.5	10.66
FT2X30X10	30	750	28.1	12.74
FT2X32X10	32	800	29.7	13.47

FT2X6 (6" wide) through FT2X32 (32" wide) are UL Classified

FLEXTRAY™ - Straight Sections

4" Deep FLEXTRAY

Part Number	Width		Wt. Per Pc.	
	in.	mm	lbs.	kg
FT4X4X10	4	100	11.25	5.10
FT4X6X10	6	150	12.79	5.80
FT4X8X10	8	200	14.32	6.49
FT4X12X10	12	300	17.39	7.89
FT4X16X10	16	400	20.45	9.27
FT4X18X10	18	450	21.99	9.97
FT4X20X10	20	500	23.52	10.67
FT4X24X10	24	600	26.59	12.06
FT4X30X10	30	750	31.19	14.15

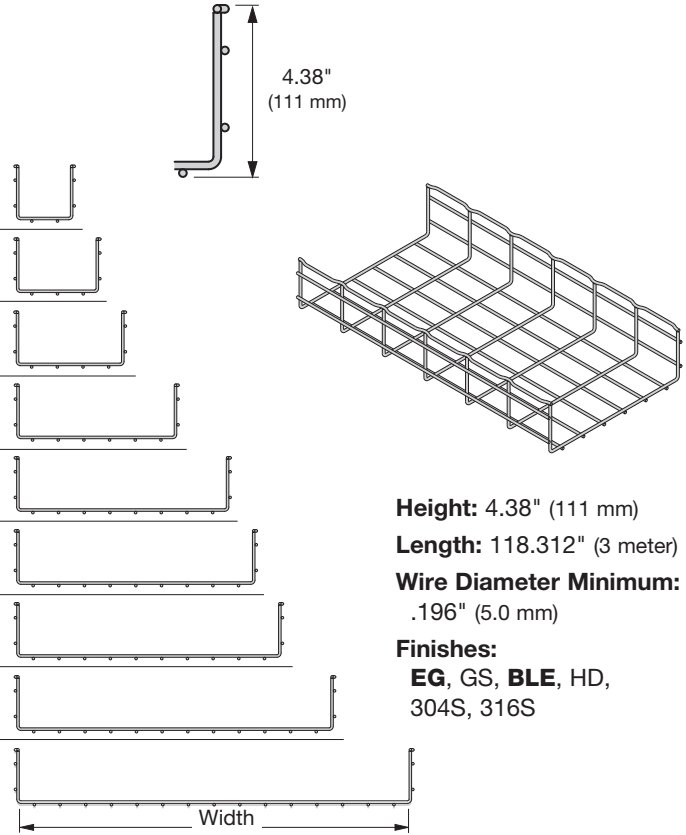


Height: 4.38" (111 mm)
Length: 118.312" (3 meter)
Wire Diameter Minimum:
 .196" (5.0 mm)
Finishes:
EG, GS, BLE, HD,
 304S, 316S

All 4" deep Flextrays are UL Classified

6" Deep FLEXTRAY

Part Number	Width		Wt. Per Pc.	
	in.	mm	lbs.	kg
FT6X8X10	8	200	17.39	7.89
FT6X12X10	12	300	20.45	9.27
FT6X16X10	16	400	23.52	10.67
FT6X18X10	18	450	25.06	11.37
FT6X20X10	20	500	26.59	12.06
FT6X24X10	24	600	29.66	13.45

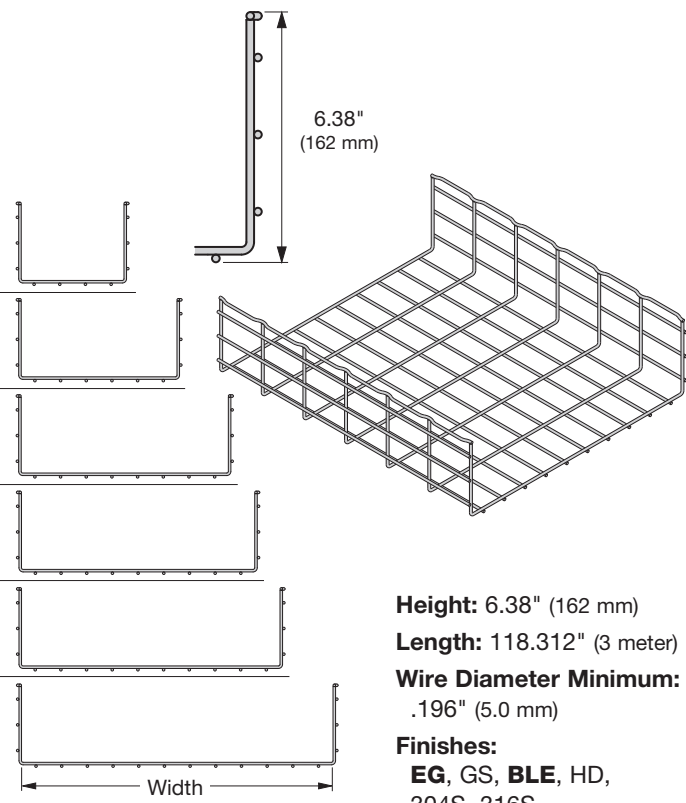


Height: 6.38" (162 mm)
Length: 118.312" (3 meter)
Wire Diameter Minimum:
 .196" (5.0 mm)
Finishes:
EG, GS, BLE, HD,
 304S, 316S

All 6" deep Flextrays are UL Classified

See page FLX-3 for finish information

FLEXTRAY™ - Splicing Accessories

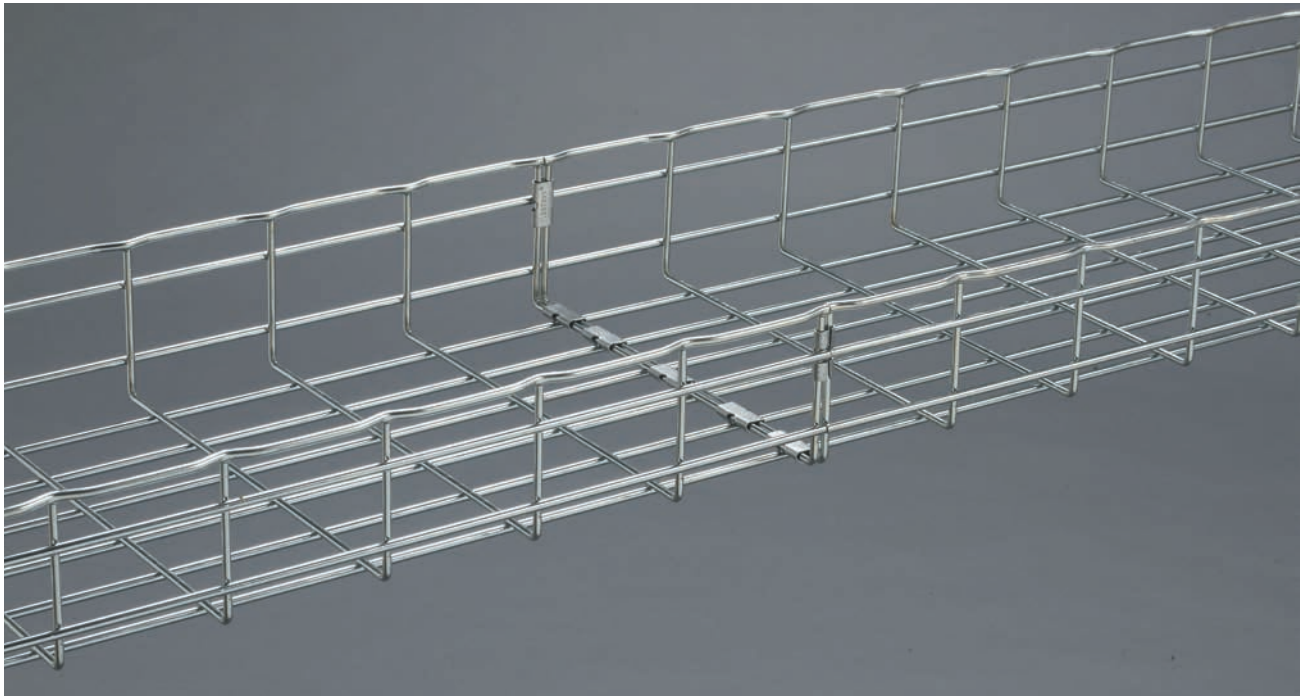

FLEXTRAY


Washer Splice Kit

- Washer is staked to bolt, holding part stationary during installation
- Fewer parts to handle
- For use with all tray widths and sizes
- Finishes __: **EG, BLE**

BLE suffix indicates black zinc finish for this part only



Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
WASHER SPL KIT __	Assembly of Staked Washer Stud/Washer & Finned Nut	50	4.5	2.04

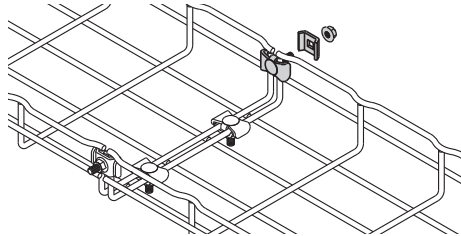

Splicing Chart (number of splices required for UL Classification)

Tray Height	Tray Width - number of splices								
	2" (50mm)	4" (100mm)	6" (150mm)	8" (200mm)	12" (300mm)	16" (400mm)	18" (450mm)	20" (500mm)	24" (600mm)
2"	NC	NC	4	4	4	4	4	5	5
4"	NM	4	5	6	6	7	7	7	8
6"	NM	NM	NM	6	6	7	7	7	8

NC = Not UL Classified in this size NM = FLEXTRAY is not manufactured in this size

Splice Hardware Components


- Works with all splicing needs
- For use with all tray widths and sizes
- Components are sold separately
- Finishes __: **EG, BLE-BLO, 304S, 316S**

FTHDWE 1/4 not available in **BLE**.

TOP WASHER & BTM WASHER not available in **BLO**.



Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTHDWE 1/4 __	1/4" x 1" Carriage Bolt & Finned nut	50	1.2	0.54
TOP WASHER __	1" Square Splice Washer	50	1.4	0.63
BTM WASHER __	1 3/16" Square Splice Washer	50	2.0	0.91

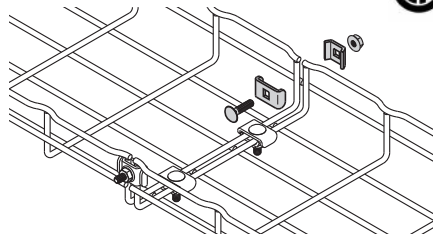

BTM WASHER



FTHDWE1/4



TOP WASHER

FLEXTRAY

Splicing Chart (number of splices required for UL Classification)

Tray Height	Tray Width - number of splices								
	2" (50mm)	4" (100mm)	6" (150mm)	8" (200mm)	12" (300mm)	16" (400mm)	18" (450mm)	20" (500mm)	24" (600mm)
2"	NC	NC	4	4	4	4	4	5	5
4"	NM	4	5	6	6	7	7	7	8
6"	NM	NM	NM	6	6	7	7	7	8


NC = Not UL Classified in this size NM = FLEXTRAY is not manufactured in this size

See page FLX-3 for finish and grounding information

FLEXTRAY™ - Splicing Accessories

Connecting Hardware

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTSCH__	Connecting Hardware	50	2.0	0.91

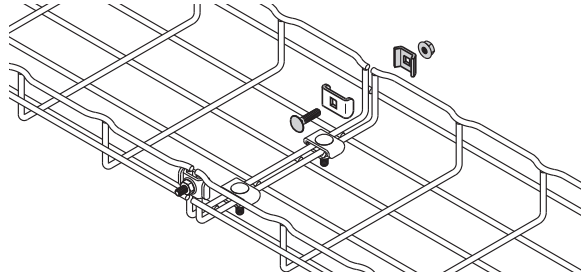

- Adaptable and designed for use with splice plate (FTS3SP), SPLICE BAR, and long splice bar (FTS36SB).
- Finishes __: **EG, BLE-BLO**, 304S, 316S

Splicing Chart (number of splices required for UL Classification)

Tray Height	Tray Width - number of splices								
	2" (50mm)	4" (100mm)	6" (150mm)	8" (200mm)	12" (300mm)	16" (400mm)	18" (450mm)	20" (500mm)	24" (600mm)
2"	NC	NC	4	4	4	4	4	5	5
4"	NM	4	5	6	6	7	7	7	8
6"	NM	NM	NM	6	6	7	7	7	8


NC = Not UL Classified in this size NM = FLEXTRAY is not manufactured in this size

Wing Splice™

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTSWN__	Wing Splice	50	3.0	1.38



- Two piece design for easy handling
- Tool-less installation
- Reduces installation time, especially when used on fittings and bends
- Finish __: **ZN**

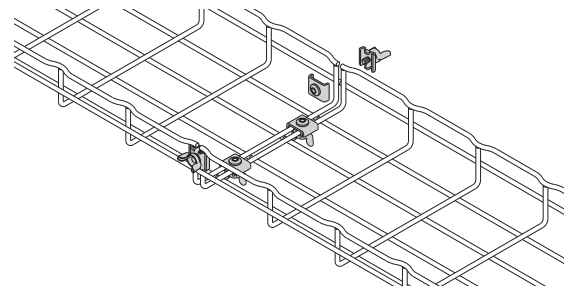

Splicing Chart (number of splices required for UL Classification)

Tray Height	Tray Width - number of splices								
	2" (50mm)	4" (100mm)	6" (150mm)	8" (200mm)	12" (300mm)	16" (400mm)	18" (450mm)	20" (500mm)	24" (600mm)
2"	NC	NC	4	4	4	4	4	5	5
4"	NM	4	5	6	6	7	7	7	8
6"	NM	NM	NM	6	6	7	7	7	8


NC = Not UL Classified in this size NM = FLEXTRAY is not manufactured in this size

FLEXTRAY™ - Splicing Accessories

Splice Plate (only)

Part Number	Description	Length	Height	Hole Diameter	Qty./Box	Wt./Box	
						lbs.	kg
FTS3SP__	Splice Plate	2.7"	1.6"	0.27"	50	6.1	2.76

- Splice plate is designed for use with connecting hardware (FTSCH) to provide added stability of splice connections
- Hardware sold separately
- Finish__: **ZN**, SS6




FLEXMATE™ Splice System

- Fastest splice connection method available in the industry
- For use with 4" (100mm) to 12" (300mm) wide tray
- FLEXMATE clips and tool sold separately
- Finishes__: **GS**, BLE


Note: Please contact B-Line when using Flexmates on tray widths larger than 12" (300mm) for specific requirements. B-Line recommends that splice/supports comply with NEMA VE-2 installation requirements

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FLEXMATE2__	Flexmate Splice Clips	100	1.0	0.45
FLEXMATE TOOL	Flexmate Splice Tool	1	0.7	0.32



FLEXMATE TOOL

Flexmate Tool is used to install splices quickly.

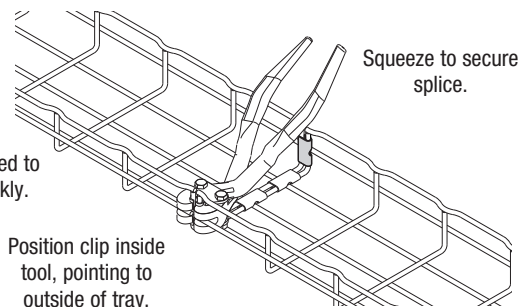

Splicing Chart (number of splices required for UL Classification)

Tray Height	Tray Width - number of splices				
	2" (50mm)	4" (100mm)	6" (150mm)	8" (200mm)	12" (300mm)
2"	NC	NC	5	5	5
4"	NM	5	6	7	7
6"	NM	NM	NM	7	7

NC = Not UL Classified in this size

NM = FLEXTRAY is not manufactured in this size

See page FLX-3 for finish and grounding information

FLEXTRAY™ - Splicing Accessories

Tab-Loc Connector


Part Number	Description	Length	Qty./Box lbs.	Wt./Box kg	
FTSTLC__	Tab-Loc Connectors	9.29"	50	7.2	3.26



- Fast splice for straight runs of tray
- For use with 2" (50mm) to 32" (800mm) wide tray to connect straight sections only
- Finishes __: **ZN**, SS6

Application Requirements

The recommendations listed are equal for all depths (except as noted).



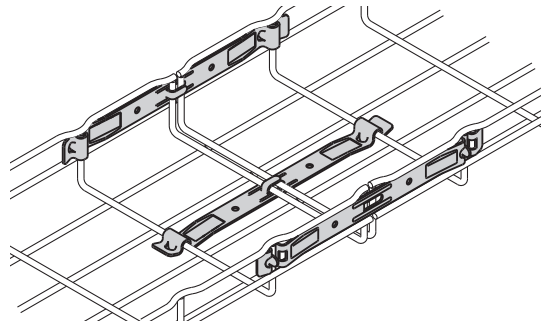


Splicing Chart

Tray Height	Tray Width - number of splices								
	2" (50mm)	4" (100mm)	6" (150mm)	8" (200mm)	12" (300mm)	16" (400mm)	18" (450mm)	20" (500mm)	24" (600mm)
2"	2	2	4	4	4	4	4	5	5
4"	NM	4	5	6	6	7	7	7	8
6"	NM	NM	NM	6	6	7	7	7	8


NM = FLEXTRAY is not manufactured in this size

Installation



Tab-Loc security without special tools.


Screwdriver can also be used to bend tab-locs (hold connector ends while bending).

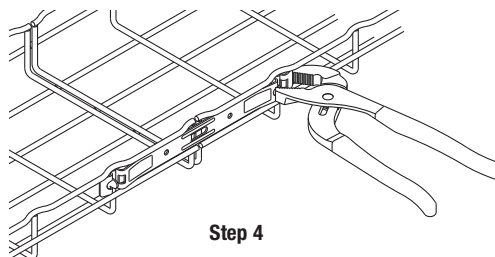


Splice Bar

- Adds rigidity to washer splice methods
- Used on side rails only (not for use in tray bottom)
- For use on trays when using splice hardware FTSCH
- Hardware sold separately
- Finishes __: **EG**, BLE, HD, 304S, 316S

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
SPLICE BAR __	10 ¹³ / ₁₆ " Long Bar	50	14.0	6.35

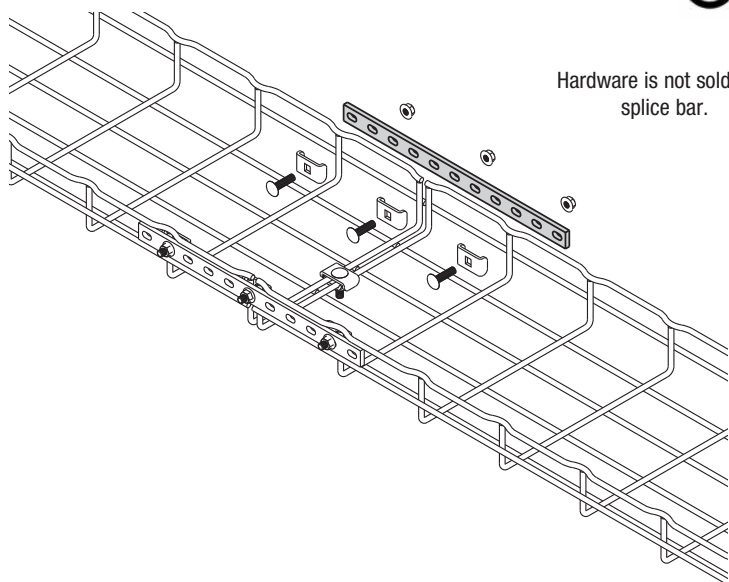

Hardware is not sold with splice bar.

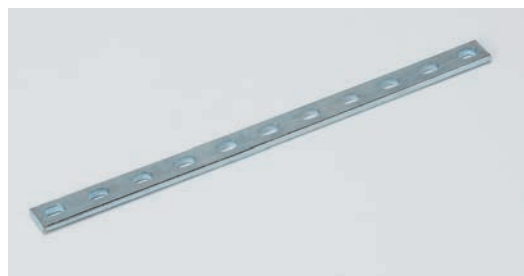

Each splice bar requires three (3) each of Hardware Splice Components - TOP WASHER, and FTHDWE 1/4 to complete connection. These items must be ordered separately.

Washer Splice Kits (WASHER SPL KIT) are required for connections on bottom of tray.

Splicing Chart (number of splices required for UL Classification)

Tray Height	Tray Width - number of splices								
	2" (50mm)	4" (100mm)	6" (150mm)	8" (200mm)	12" (300mm)	16" (400mm)	18" (450mm)	20" (500mm)	24" (600mm)
2"	NC	NC	2	2	2	2	2	2	2
4"	NM	4	4	4	4	4	4	4	4
6"	NM	NM	NM	4	4	4	4	4	4

NC = Not UL Classified in this size NM = FLEXTRAY is not manufactured in this size


See page FLX-3 for finish and grounding information

FLEXTRAY™ - Splicing Accessories

Splice Bar Kit

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTSBK__	12" Long Splice Bar Kit	5 Sets	6.4	2.90

- Adds rigidity
- Includes two (2) SPLICE BAR and hardware
- Finishes __: **ZN**, FB, SS6

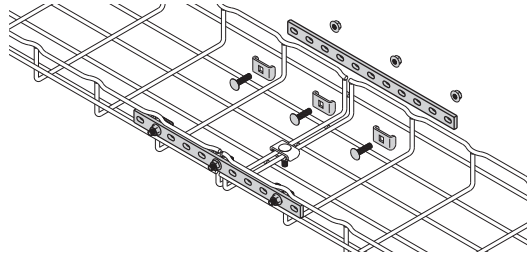

Splicing Chart (number of splices required for UL Classification)


Tray Height	Tray Width - number of splices								
	2" (50mm)	4" (100mm)	6" (150mm)	8" (200mm)	12" (300mm)	16" (400mm)	18" (450mm)	20" (500mm)	24" (600mm)
2"	NC	NC	2	2	2	2	2	2	2
4"	NM	4	4	4	4	4	4	4	4
6"	NM	NM	NM	4	4	4	4	4	4

NC = Not UL Classified in this size NM = FLEXTRAY is not manufactured in this size

Expansion Splice Kit

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTS12ESK__	12" Long Expansion Splice Kit	1 Kit	0.45	0.20

- Allows 1³/₄" (44mm) of expansion between two pieces of Flextray at expansion joints.
- To install, tighten nylon loc-nut until nut comes into contact with splice bar, then loosen approximately 1/4 turn.
- Includes two (2) splice bars and eight (8) sets of hardware
- Finishes __: **ZN**



Long Splice Bar (only)

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTS12SB__	12" Long - 6 Slots	1	0.13	0.06
FTS36SB__	36" Long - 18 Slots	1	0.40	0.18

- FTS36SB long splice bar is used for assembly of large radius horizontal bends or field cut into short splice bars
- Splice Bars are designed for use with connecting hardware (FTSCH)
- Hardware sold separately
- Finishes __: **ZN**, FB, SS6



FTS12SB




FTS36SB

Hold Down Plate

- Easy way to mount 4" (100mm) wide tray for raceway run.
- Use 1/4" screws to attach SUPT WASHER to your specific wall/stud application (hardware sold separately).
- FTA6HD can be used in pairs to create a center-hung support using 3/8" rod.
- To protect cables use threaded rod protector (page FLX-20).
- To complete 3/8" center hanger assembly use:
 - 2 - FTA6HD
 - 2 - HN 3/8"-16 hex nuts
- Finish: **ZN**, SS6


Part Number	Slot Size	Qty./Box	Wt./Box	
			lbs.	kg
SUPT WASHER__	.28" x .70"	50	4.7	2.13
FTA6HD__	.40" x .70"	50	3.5	1.59

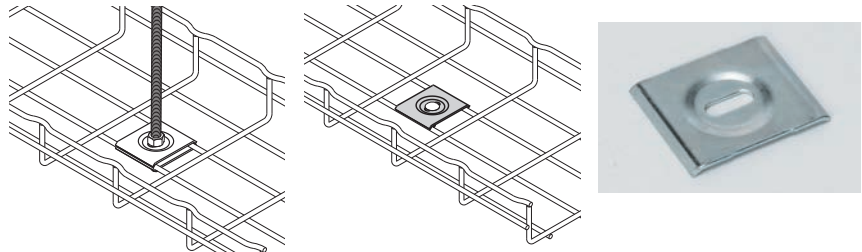

- Horizontal adjustable kit can be used to create horizontal angles from prepared FLEXTRAY straight sections
- Conveniently poly-bagged
- Finishes __: **EG**, BLE, 316S

Horizontal Adjustable Kit


Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTSHAK__	Horizontal Adjustable Kit	10	2.4	1.09

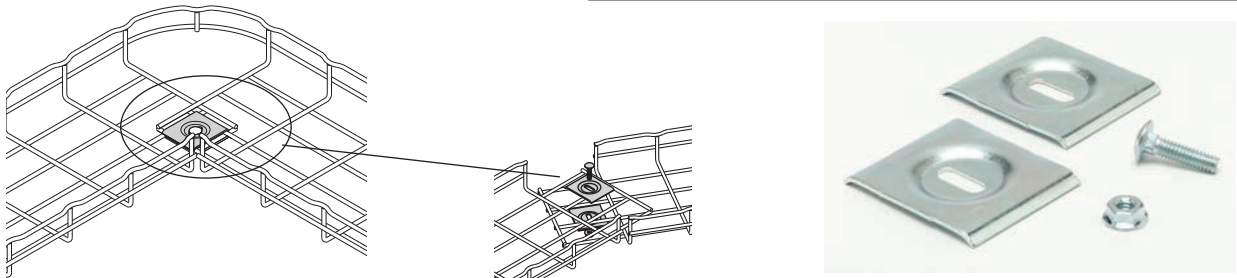

- For fast assembly of 90° turns and tee fittings
- For use with all tray widths and sizes
- One kit will make two 90° turns or one tee fitting
- 90 DEGREE KIT: includes: two (2) 90° splice bars and eight (8) FTSCH
- Finishes __: **EG**, BLE, 316S

90 Degree Kit

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
90 DEGREE KIT__	90 degree splice bar & hardware	1	1.3	0.59

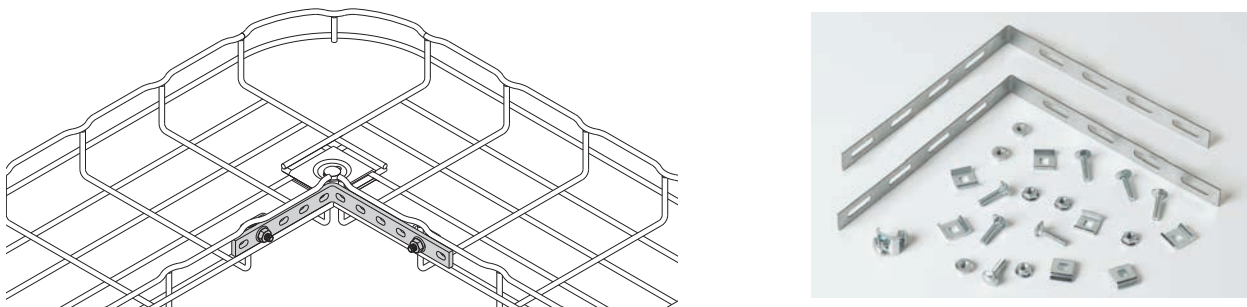


See page FLX-3 for finish and grounding information

FLEXTRAY™ - Splicing Accessories

Components Required to Connect Two Sections of FLEXTRAY


System Part Number	System Width in. mm	Connector Assembly WASHER SPL KIT	Connecting Hardware FTSCH	Splice Plate FTS3SP	Splice Bar SPLICE BAR
--------------------	------------------------	--------------------------------------	------------------------------	------------------------	--------------------------



(*) 4 for 4" Deep FLEXTRAY
6 for 6" Deep FLEXTRAY

FT2X2	2"	50	2	-	-
FT2X4	4"	100	2	-	-
FT2X6	6"	150	4 ¹	-	-
FT2X8	8"	200	4 ¹	-	-
FT2X12	12"	300	4 ¹	-	-
FT2X16	16"	400	4 ¹	-	-
FT2X18	18"	450	4 ¹	-	-
FT2X20	20"	500	5 ¹	-	-
FT2X24	24"	600	5 ¹	-	-
FT2X30	30"	750	7 ¹	-	-
FT2X32	32"	800	7 ¹	-	-
FT4X4	4"	100	4 ¹	-	-
FT4X6	6"	150	5 ¹	-	-
FT4X8	8"	200	6 ²	-	-
FT(*)X12	12"	300	6 ²	-	-
FT(*)X16	16"	400	7 ²	-	-
FT(*)X18	18"	450	7 ²	-	-
FT(*)X20	20"	500	7 ²	-	-
FT(*)X24	24"	600	8 ²	-	-
FT(*)X30	30"	750	8 ²	-	-


Washer Splice Kits

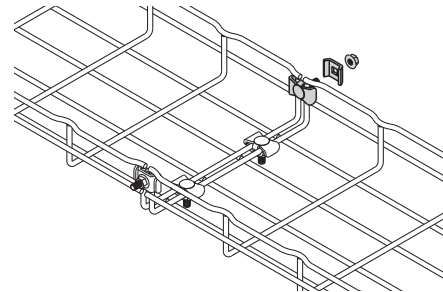

- 1 Install one kit on each side and remaining kit(s) on bottom.
- 2 Install two kits on each side and remaining kits on bottom.

FT2X2	2"	50	-	2	2
FT2X4	4"	100	-	2	2
FT2X6	6"	150	1	2	2
FT2X8	8"	200	1	2	2
FT2X12	12"	300	2	2	2
FT2X16	16"	400	2	2	2
FT2X18	18"	450	2	2	2
FT2X20	20"	500	2	2	2
FT2X24	24"	600	2	2	2
FT2X30	30"	750	4	2	2
FT2X32	32"	800	4	2	2
FT4X4	4"	100	1	2	2
FT4X6	6"	150	2	2	2
FT4X8	8"	200	2	2	2
FT(*)X12	12"	300	3	2	2
FT(*)X16	16"	400	4	2	2
FT(*)X18	18"	450	4	2	2
FT(*)X20	20"	500	4	2	2
FT(*)X24	24"	600	4	2	2
FT(*)X30	30"	750	5	2	2


Splice Plates

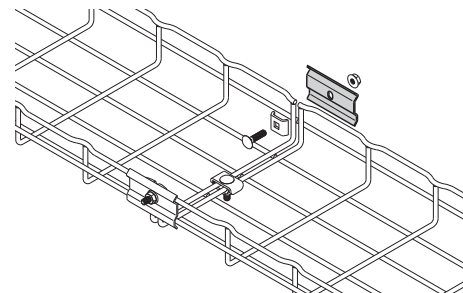

Install splice plates on sides and
WASHER SPL KIT on bottom.

FT2X2	2"	50	-	2	2
FT2X4	4"	100	-	2	2
FT2X6	6"	150	1	2	2
FT2X8	8"	200	1	2	2
FT2X12	12"	300	2	2	2
FT2X16	16"	400	2	2	2
FT2X18	18"	450	2	2	2
FT2X20	21"	500	2	2	2
FT2X24	24"	600	2	2	2
FT2X30	30"	750	3	6	2
FT2X32	32"	800	3	6	2
FT4X4	4"	100	1	2	2
FT4X6	6"	150	2	2	2
FT4X8	8"	200	2	6	2
FT(*)X12	12"	300	2	6	2
FT(*)X16	16"	400	3	6	2
FT(*)X18	18"	450	3	6	2
FT(*)X20	20"	500	3	6	2
FT(*)X24	24"	600	3	6	2
FT(*)X30	30"	750	4	6	2

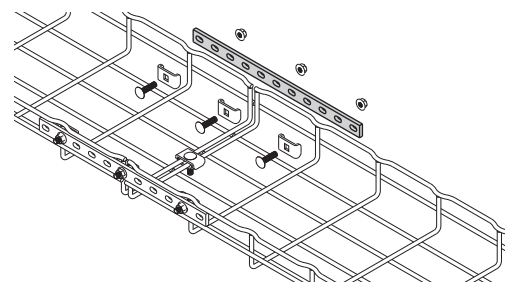


Splice Bars





Install splice bars on sides and
WASHER SPL KIT on bottom.

FLEXTRAY™ - Splicing Accessories

Splice Plate Kits for 2" Deep FLEXTRAY


Part Number	System Width		Weight Per 100		Box Quantity	Conveniently poly-bagged for use with 2" Deep FLEXTRAY
	in.	mm	lbs.	kg		
FTS20SK	2"	50	2.91	1.32	10	
	4"	100				
FTS21SK	6"	150	3.63	1.64	10	
	8"	200				
FTS22SK	12"	300	4.35	1.97	10	
	18"	450				
	20"	500				
	24"	600				

Splice Plate Kits for 4" & 6" Deep FLEXTRAY

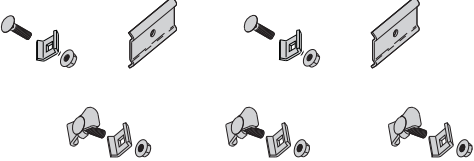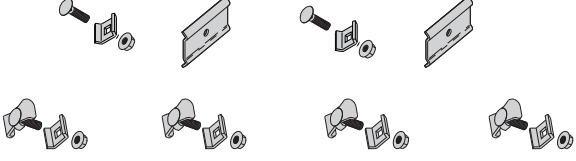Part Number	System Width		Weight Per 100		Box Quantity	Conveniently poly-bagged for use with 4" & 6" Deep FLEXTRAY
	in.	mm	lbs.	kg		
FTS23SK	4"	100	5.07	2.30	10	
	6"	150				
	8"	200				
	12"	300				
FTS24SK	18"	450	5.79	2.62	10	
	20"	500				
	24"	600				

FLEXTRAY

FLEXTRAY™ - Ceiling Support Methods

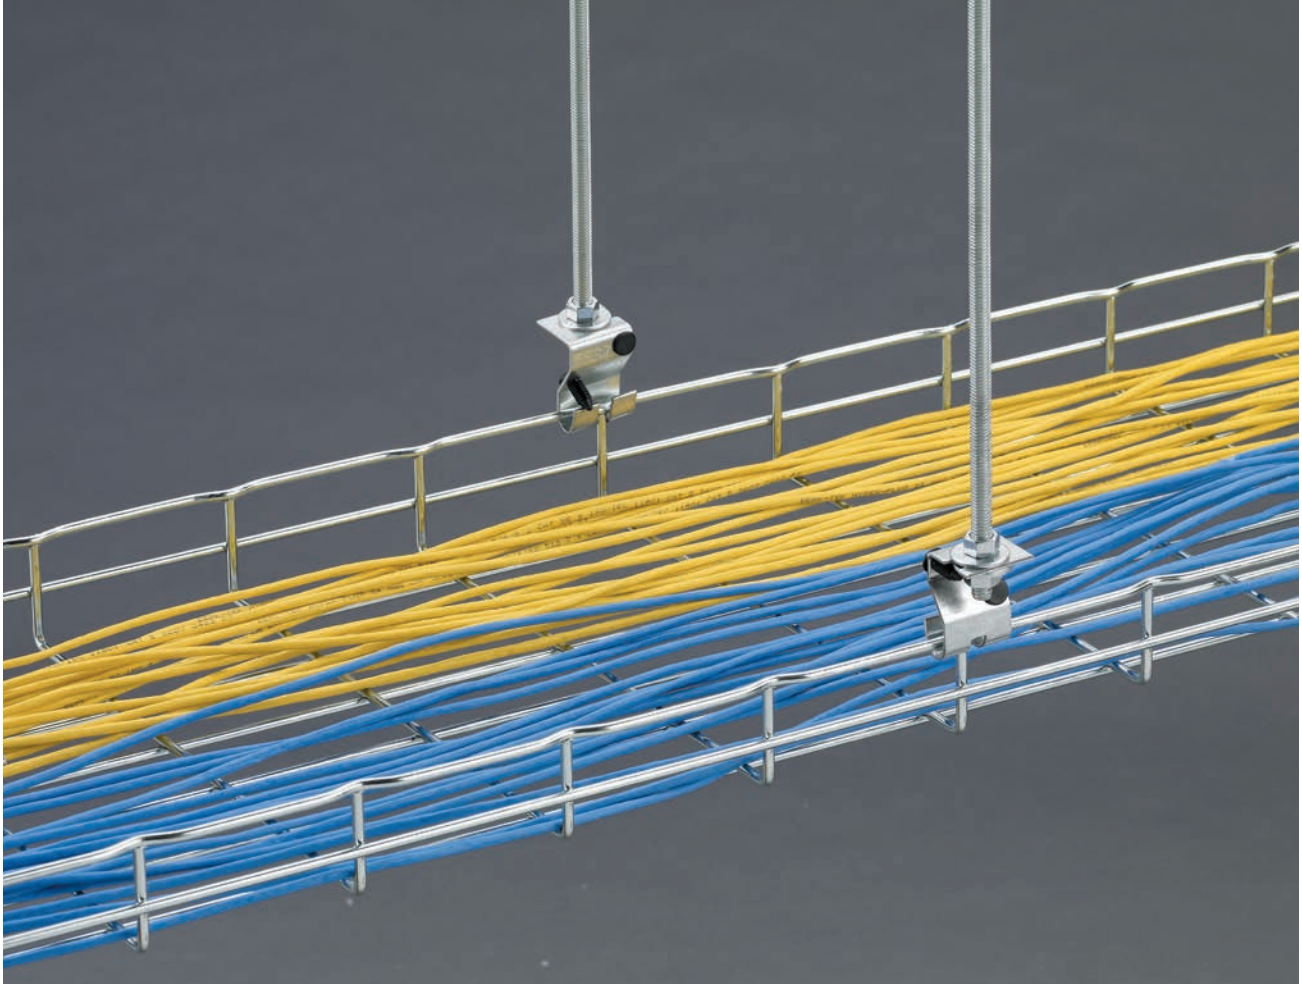

FLEXTRAY


FLEXTRAY™ - Ceiling Support Methods

Flip Clip™

- Accommodates 1/4" and 3/8" rod sizes
- Installs quickly with a screwdriver or pliers thus reducing installation time
- Requires only one hex nut (not included) to hang and level the FLEXTRAY
- Retainer tabs can be bent over to lock-in the threaded rod and wire basket
- Finishes __: **ZN**, FB, SS6

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
WB46H__	Flip Clip	50	5.2	2.36


Snap retainer stops in place after cable is loaded.

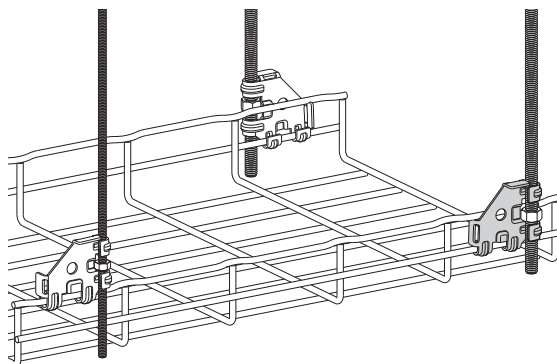

Trapeze Support

- Trapeze Clip installs fast
- For use with trays up to 4" (100mm) deep, 12" (300mm) wide, and spans up to 8'-0" (2.44m)
- Tray can be released from support to allow side cable loading
- Accepts 1/4" and 3/8" threaded rod sizes
- Finishes __: **GS**, BLE

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
TRAPEZE SUPT2__	Trapeze Support Clip	50 trapeze clips 100 retainer stops	7.0	3.17

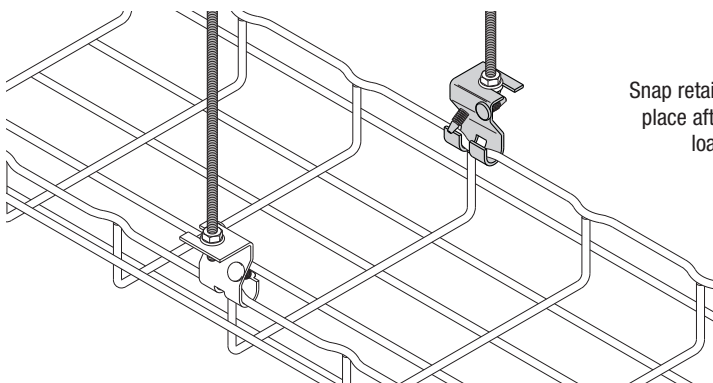

Snap retainer stops in place after cable is loaded.



FLEXTRAY

See page FLX-3 for finish information

FLEXTRAY™ - Ceiling Support Methods


2" Center Hanger

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
2 IN CTR SUPT__	Center Support Hanger for FT2x2	50	5.0	2.27

- For use with 2" (50mm) tray widths only
- Accepts 1/4" threaded rod
- Hardware sold separately
- Finishes __: **GS**, BLE






Assemble with ATTACHMENT CLP & FTHDWE 1/4 hardware.

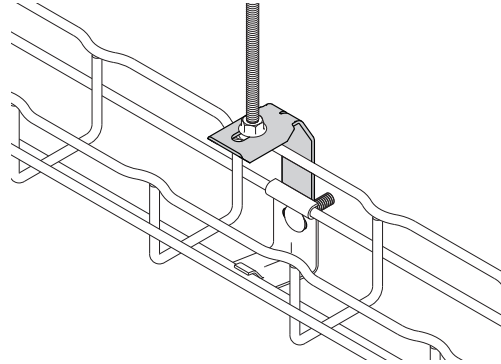

Hold Down Plate

Part Number	Slot Size	Qty./Box	Wt./Box	
			lbs.	kg
SUPT WASHER__	.28" x .70"	50	4.7	2.13
FTA6HD__	.40" x .70"	50	3.5	1.59

- Easy way to mount 4" (100mm) wide tray for raceway run.
- Use 1/4" screws to attach SUPT WASHER to your specific wall/stud application (hardware sold separately).
- FTA6HD can be used in pairs to create a center-hung support using 3/8" rod.
- To protect cables use threaded rod protector (page FLX-20).
- To complete 3/8" center hanger assembly use:
 - 2 - FTA6HD
 - 2 - HN 3/8"-16 hex nuts
- Finish: **ZN**, SS6



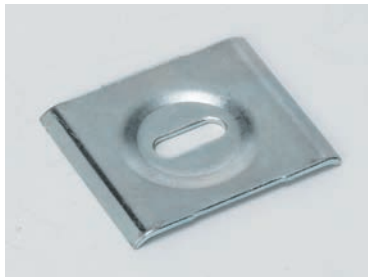


FLEXTRAY™ - Ceiling Support Methods

Mounting Bracket

- Designed to support FT2X2X10 Flextray
- Click tabs for FLEXTRAY attachment
- Use 1/4" hardware and washer (not included) to mount bracket
- Finishes __: **SS6**


Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTB2UB__	Light Duty Wall/Rack Bracket	10	2.1	0.95

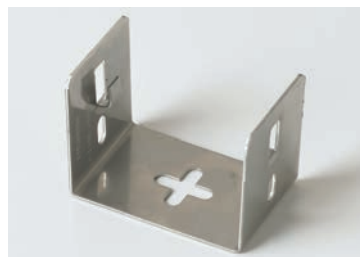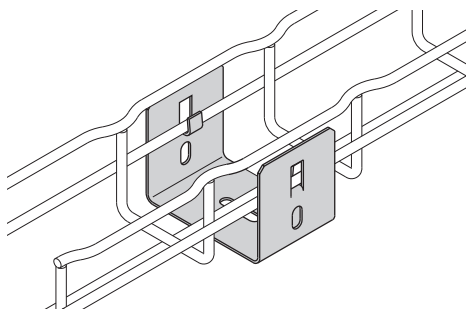

- Use for light duty cabling applications
- For use with 1 1/2" (38mm) & 2" (51mm) deep tray with 4" (100mm) and 6" (150mm) widths
- When hanging 4" (100mm) wide tray, center hung clip must be run parallel with the tray
- Built-in hold down tab
- Accepts 1/4" threaded rod
- Threaded rod and nuts sold separately
- Finishes __: **GS**, BLE

Center Hung Clip

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
CTR HUNG CLP__	Light Duty Center Hanger	50	4.0	1.81

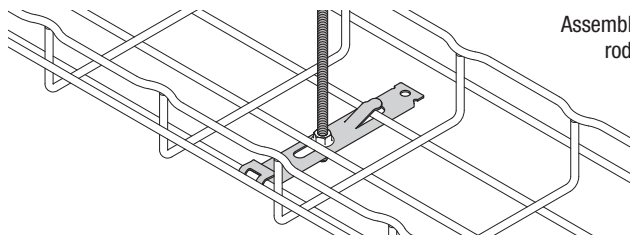


Assemble with 1/4" threaded rod and finned nut



- Use to protect cables from 1/4" to 1/2" threaded rod
- PVC UL94V-0 material
- Color: Gray
- Not plenum rated

Threaded Rod Protector

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
SB301-1/2x8__	Rod Protector	1	0.03	0.013




See page FLX-3 for finish information

FLEXTRAY™ - Ceiling Support Methods


Center Trapeze Hanger

Part Number	Maximum Tray Width		Actual Length		Wt./Pc.	
	in.	mm	in.	mm	lbs.	kg
FTB06CT	6"	150	9.78"	248	0.61	0.27
FTB08CT	8"	200	11.75"	298	0.74	0.33
FTB12CT	12"	300	15.69"	398	0.98	0.44
FTB16CT	16"	400	19.63"	498	1.61	0.73
FTB18CT	18"	450	21.59"	548	1.77	0.80
FTB20CT	20"	500	23.56"	598	1.93	0.87
FTB24CT	24"	600	27.50"	698	2.25	1.02

- Can be installed as center-hung or traditional trapeze hanger
- Multiple options to secure FLEXTRAY to hanger
 - Built in hold down tabs (use screwdriver to bend down tab)
 - Compatible with TOOLLESS CLIP with snap-in locking pin
 - Compatible with WBUHD hold down clip when tray crosswire is aligned over top of hanger
 - Slots and holes for optional hardware attachment
- Corrosion resistant pre-galvanized zinc finish (other finishes available upon request)
- Center hole for up to 1/2" rod
- Hole on each end for up to 3/8" rod
- Threaded rod protector available (SB301-1/2 x 8)
- When 1/2" trapeze rods are required, add -1/2 to end of part number when ordering

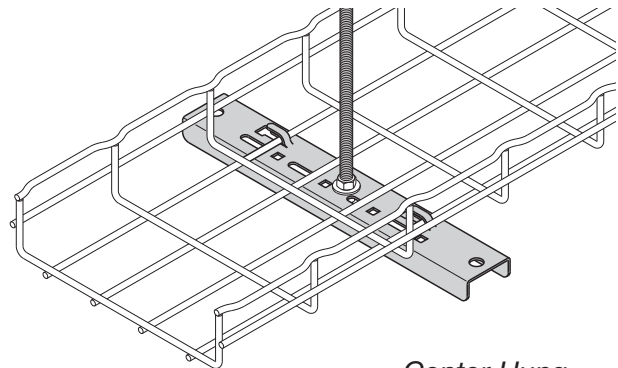

Center Hung

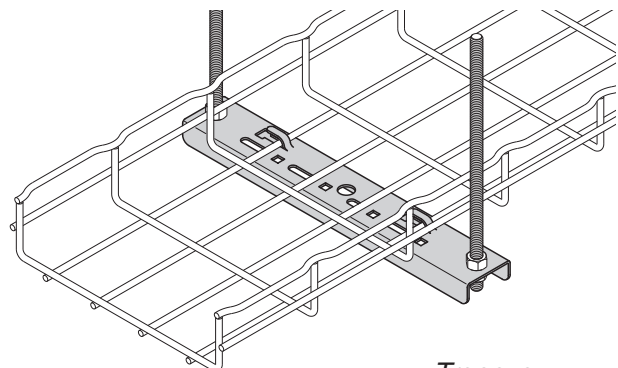

Trapeze


KwikWire™ Clamps & Wire Rope

- KwikWire system replaces jack chain or ATR to support lighting, ductwork, and FLEXTRAY.
- Can be quickly installed around beams - No drilling required.
- Ideal for sloped ceilings - can hang objects at up to 60° angles.
- Simple height adjustments are made by releasing locking tab, no tools required.
- Spools of wire can be cut to length in field, reducing waste and up front planning.

Part Number	Clamp Description For Use With Rope Diameter	Qty./Box
BKC100	1/32", 1/16" & 3/32"	100
BKC200	3/32", 1/8" & 3/16"	50



Part Number	Rope Diameter - Working Load	Qty./Spool
BKW063 (1)	1/16" - 96 lbs.	500 ft.
BKW094 (1)	3/32" - 184 lbs.	500 ft.
BKW125 (1)	1/8" - 340 lbs.	500 ft.
BKW188 (2)	3/16" - 840 lbs.	250 ft.
BKCC	Wire Rope Cutter	1

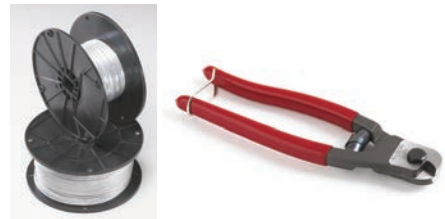

Wire Rope Construction



KwikWire™ Clamp Working Loads*

Clamp Part No.	Wire Rope Dia.	Lbs. Safety Factor 5
BKC100	1/32"	0-22
BKC100	1/16"	0-75
BKC100	3/32"	25-150
BKC200	3/32"	25-150
BKC200	1/8"	25-250
BKC200	3/16"	50-640

* Working loads shown are for hanging vertically. For suspending at 15°, 30°, 45° or 60° angles from vertical, use the following percentage of the working loads from the chart:

15° = 96%
30° = 86%
45° = 70%
60° = 50%

KwikPak™ Wire Rope & Clamps

KwikPak™ makes handling KwikWire™ a breeze!

- Refill your starter kit with a B-Line KwikPak™.
- KwikPaks include KwikWire clamps and a spool of wire rope.
- KwikPaks are shipped in a specially designed dispenser box to ease field cutting of wire.



Part Number	Kit Includes - Working Load	Qty./Box
BKP10063	BKC100 (100 pcs.), Cable Cutter, 1/16"Ø Wire Rope (500 ft.)	1
BKP10094	BKC100 (100 pcs.), Cable Cutter, 3/32"Ø Wire Rope (500 ft.)	1
BKP15094	BKC150 (100 pcs.), Cable Cutter, 3/32"Ø Wire Rope (500 ft.)	1
BKP15125	BKC150 (100 pcs.), Cable Cutter, 1/8"Ø Wire Rope (500 ft.)	1
BKP20125	BKC200 (50 pcs.), Cable Cutter, 1/8"Ø Wire Rope (500 ft.)	1
BKP20188	BKC200 (50 pcs.), Cable Cutter, 3/16"Ø Wire Rope (250 ft.)	1



See page FLX-3 for finish information

FLEXTRAY™ - Ceiling Support Methods

KwikWire™ Accessory Features

- Reduces on the job installation time
- Can be installed quickly without drilling into existing structure
- Increases versatility in the field
- KwikWire accessory system reduces inventory and shipping costs
- No more sawing, filing, or fixing nuts
- Designed for use with cable tray, lighting, and HVAC
- Eliminates the need for all threaded rod
- Cost effective solution for jack chain
- “Y” style accessories require 50% less drilling



KwikWire Accessory Numbering System

Product Line	Assembly Configuration	Leg Termination	Leg Length	Wire Rope Diameter	Straight Length	Assembly or Kit
BK = KwikWire	Blank = Single Leg Y = 2 Legs 3 - 3 Legs	A = Angle Bracket w/Pin H = Hook L = Loop T = Toggle W = Fuse Cut B25 = Bolt w/ 1/4"-20 Thread B38 = Bolt w/ 3/8"-16 Thread BM6 = Bolt w/ M6 Thread BM8 = Bolt w/ M8 Thread BM10 = Bolt w/ M10 Thread	Blank = See Straight Length 18 = 18" Leg 30 = 30" Leg	063 = 1/16" 094 = 3/32"	Blank = Loop w/ Plastic Tube 18 = 18" 30 = 30" 40 = 40" 80 = 80" 120 = 120" 180 = 180" 240 = 240" 360 = 360"	Blank = Assembly Only K = Kit (Assembly & BKC100 Clamp)

Examples

BKYT18-094-120K

BK **Y** **T** **18** - **094** - **120** **K**

KwikWire Accessory

2 legs - toggle leg termination - 18" legs - 3/32" diameter wire - 120" straight length - kit with clamp

BKL-063-120K

BK **L** - **063** - **120** **K**

KwikWire Accessory

single leg - looped leg termination - 1/16" diameter wire - 120" straight length - kit with clamp

KwikWire™ ‘Y’ Style Hook Termination


UPC/Part Number	Catalog Number	Leg Length	Wire Rope Diameter	Length
782051 67342	● BKYH18-094-40K	18"	3/32"	40"
782051 67343	● BKYH18-094-80K	18"	3/32"	80"
782051 67344	● BKYH18-094-120K	18"	3/32"	120"
782051 68856	● BKYH18-094-180K	18"	3/32"	180"
782051 68945	● BKYH18-094-240K	18"	3/32"	240"
782051 67345	● BKYH18-094-360K	18"	3/32"	360"
782051 68946	● BKYH30-094-40K	30"	3/32"	40"
782051 68948	● BKYH30-094-80K	30"	3/32"	80"
782051 68949	● BKYH30-094-120K	30"	3/32"	120"
782051 68950	● BKYH30-094-180K	30"	3/32"	180"
782051 68951	● BKYH30-094-240K	30"	3/32"	240"
782051 68952	● BKYH30-094-360K	30"	3/32"	360"



Box Quantity - 10
5 bags containing 2 pieces per bag

KwikWire™ ‘Y’ Style Hook Termination With Loop


UPC/Part Number	Catalog Number	Wire Rope Diameter	Length
782051 67341	● BKYH18-094	3/32"	18"
782051 68978	● BKYH30-094	3/32"	30"

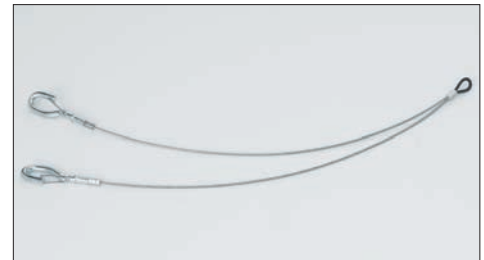

Box Quantity - 10
5 bags containing 2 pieces per bag


- Hook designed to connect up to 3/8" diameter wire.
- Available as a wire rope with hook termination only or as a ready-to-use kit with a BKC100 clamp.
- Available in lengths of 40", 80", 120", 180", 240", and 360".
- Available in single, double (Y), and triple (3) leg styles

For more information on KwikWire accessories see the KwikWire catalog.



See page FLX-3 for finish information

FLEXTRAY™ - Wall Support Methods

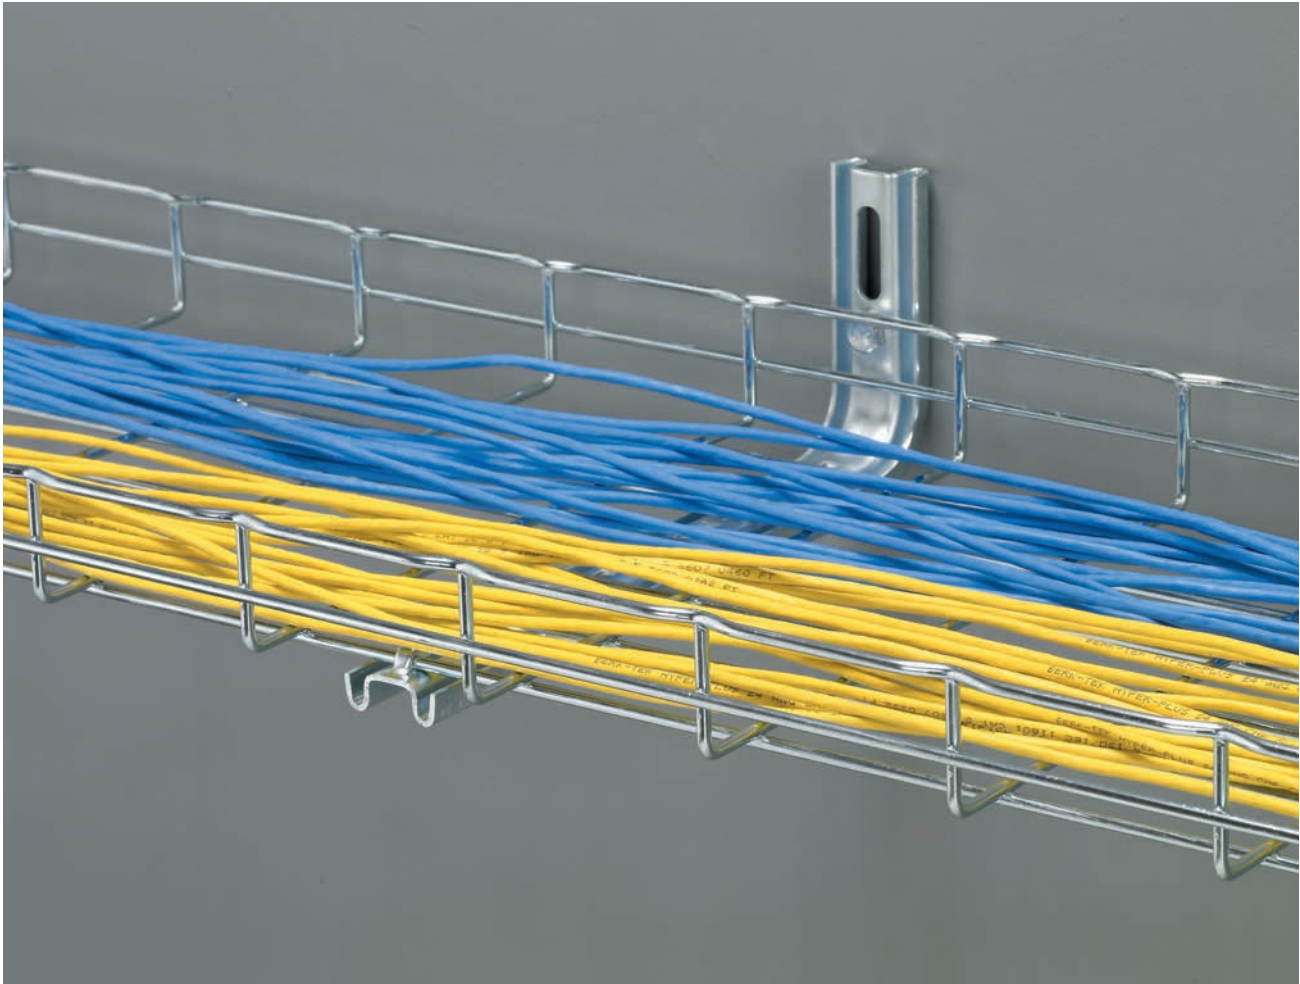


FLEXTRAY

FLEXTRAY™ - Wall Support Methods

Shelf Brackets

- Heavy-duty support bracket
- For use with 6" (150mm) to 24" (600mm) wide trays
- Built-in tab for hold down
- Optional hardware (FTSCH) sold separately
- Finishes __: **GLV**, HDG, SS6

Part Number	Use With Tray Width	Qty./Box	Wt./Box	
			lbs.	kg
FTB06CS __	6" (150mm)	1	0.5	0.22
FTB08CS __	8" (200mm)	1	0.6	0.27
FTB12CS __	12" (300mm)	1	1.2	0.54
FTB16CS __	16" (400mm)	1	1.7	0.77
FTB18CS __	18" (450mm)	1	1.9	0.86
FTB20CS __	20" (500mm)	1	2.6	1.18
FTB24CS __	24" (600mm)	1	3.2	1.45

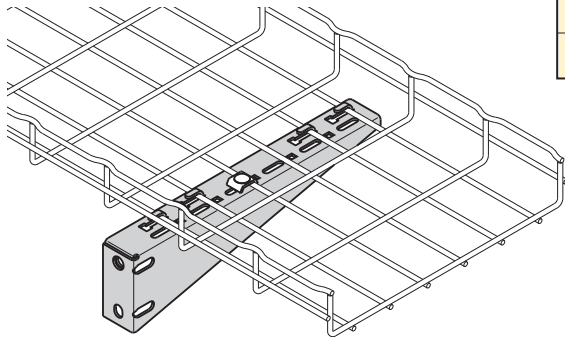


FTB24CS shown


L Brackets

- Installs tray to wall cleanly
- Built-in tab for hold down (not available in stainless steel)
- For use with 4" (100mm) to 24" (600mm) wide trays
- Use with pedestal clamp in raised floor applications
- Optional hardware (FTSCH) sold separately
- Finishes __: **EG**, HD, BLE, 316S

Part Number	Use With Tray Width	Qty./Box	Wt./Box	
			lbs.	kg
4 L BRKT __	4" (100mm)	1	0.6	0.27
8 L BRKT __	6" (150mm) & 8" (200mm)	1	0.8	0.36
12 L BRKT __	12" (300mm)	1	1.3	0.59
16 L BRKT __	16" (400mm)	1	1.4	0.63
20 L BRKT __	18" & 20" (450 & 500mm)	1	2.0	0.91
24 L BRKT __	24" (600mm)	1	2.3	1.04

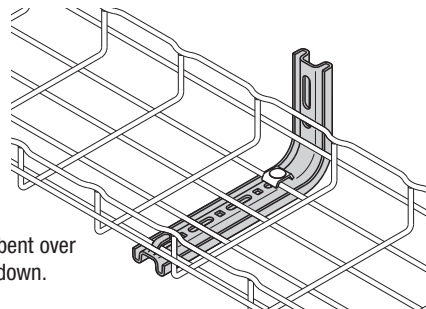

Tab can be bent over for hold down.

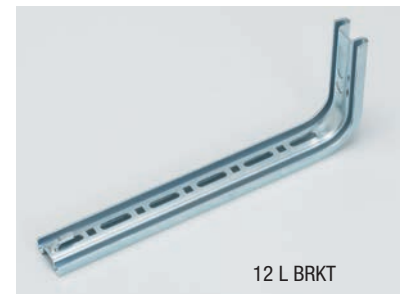


12 L BRKT

See page FLX-3 for finish information


FLEXTRAY™ - Wall Support Methods

Z Brackets

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
Z BRKT__	Z Bracket	25	14.0	6.35

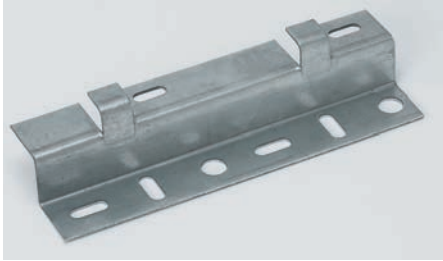


- Used for horizontal and/or vertical mounting
- 8" (200mm) wide bracket for use with 4" (100mm) to 32" (800mm) wide trays
- Can be used to offset trays from floor
- Can be used to terminate tray run at wall
- Multiple brackets can be used for wider tray widths
- Finishes __: **GS**, BLE

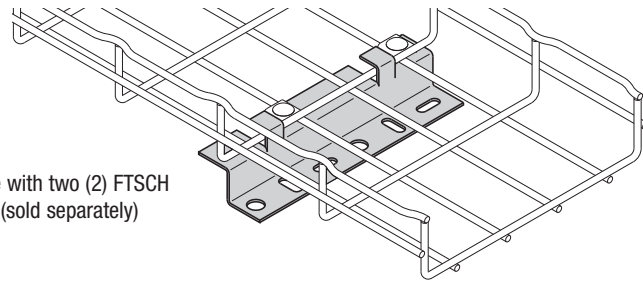



Use with two (2) FTSCH
(sold separately)

Hold Down Plate

Part Number	Slot Size	Qty./Box	Wt./Box	
			lbs.	kg
SUPT WASHER__	.28" x .70"	50	4.7	2.13
FTA6HD__	.40" x .70"	50	3.5	1.59



- Easy way to mount 4" (100mm) wide tray for raceway run.
- Use 1/4" screws to attach SUPT WASHER to your specific wall/stud application (hardware sold separately).
- FTA6HD can be used in pairs to create a center-hung support using 3/8" rod.
- To protect cables use threaded rod protector (page FLX-20).
- To complete 3/8" center hanger assembly use:
 - 2 - FTA6HD
 - 2 - HN 3/8"-16 hex nuts
- Finish: **ZN**, SS6

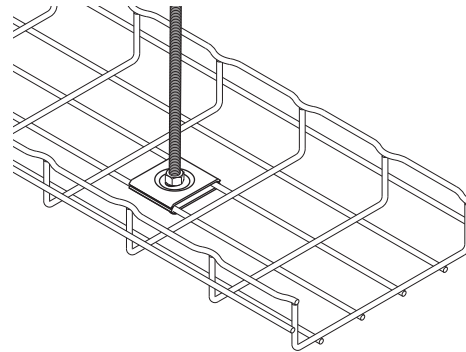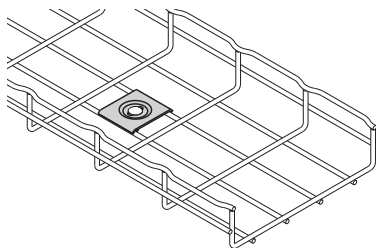


FLEXTRAY™ - Wall Support Methods

Attachment Clips

- Wall attachment for 2" (50mm) wide tray only (FT2X2X10)
- Low-profile appearance
- Built-in tab to hold down tray
- Can also be used with 2" (50mm) Center Hanger (see page 60)
- Hardware sold separately
- Finishes __: **GS**, BLE


Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
ATTACHMENT CLP__	Attachment Clip Support for FT2x2x10	50	3.4	1.54

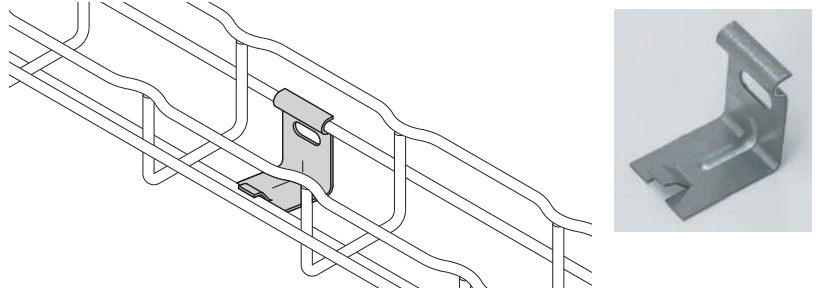

Mounting Bracket

- Designed to support FT2X2X10 Flextray
- Click tabs for FLEXTRAY attachment
- Use 1/4" hardware and washer (not included) to mount bracket
- Finishes __: **SS6**


Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTB2UB__	Light Duty Wall/Rack Bracket	10	2.1	0.95

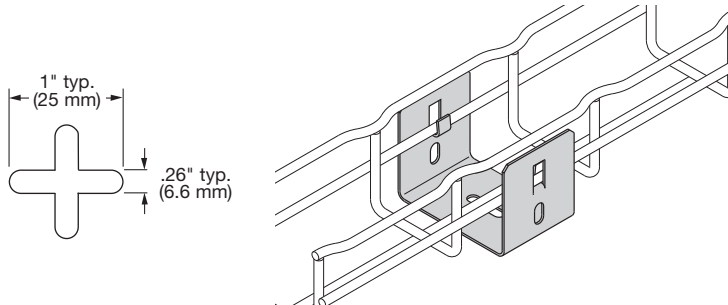

Wall Supports

- Used to attach 2" (50mm) or 4" (100mm) wide trays to walls, struts or cabinets
- Use for raceway mounting
- Mount to metal framing for vertical support
- Tabs are built in for tray hold down
- Mount to side rail for electrical box connection
- Finishes __: **GLV**

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTA050CC__	Wall Support Bracket	1	0.8	0.36

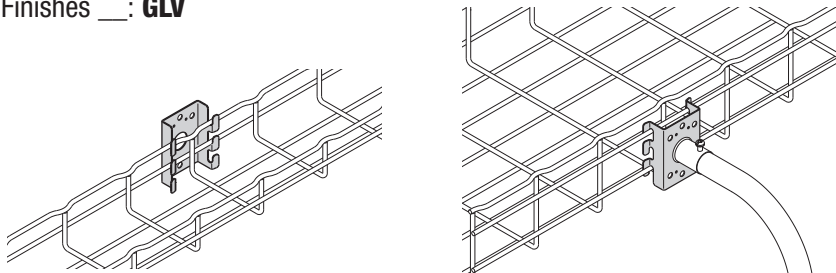


See page FLX-3 for finish information

FLEXTRAY™ - Wall Support Methods

Wall Termination Kit

Part Number	Length	Qty./Box	Wt./Box	
			lbs.	kg
FTA9WTK__	9"	1	1.3	0.59

- Kit includes all hardware necessary to support FLEXTRAY when terminated at a wall
- Mount slotted angle to wall with up to 3/8" hardware (not included)
- Finishes __: **ZN**, FB, SS6

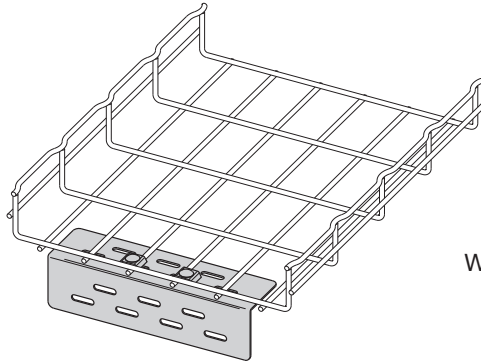

Wall Termination Kit includes:
1 - Angle with Slots
2 - FTSCH

Wall Mount Kit

Part Number	Length	Qty./Box	Wt./Box	
			lbs.	kg
WB48WMK__	8"	1	0.76	0.35
WB1224WMK__	12"	1	1.22	0.55


- Kit includes all components necessary to mount FLEXTRAY to a wall horizontally or vertically
- Mount strut to wall with up to 1/2" hardware (not included)
- Finish: Channel - **GLV**
Hardware - **ZN**
Available in SS6




WB1224WMK shown

Wall Mount Kit includes:

WB48WMK	WB1224WMK	
1	1	B54SH Strut
1	2	SUPT WASHER Hold Downs
1	2	1/4"-20 x 1" Slotted Head Screw
1	2	N224WO Channel Nut

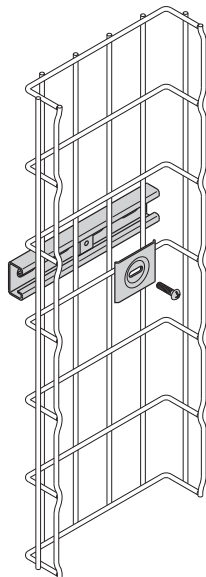

Vertically Mounted

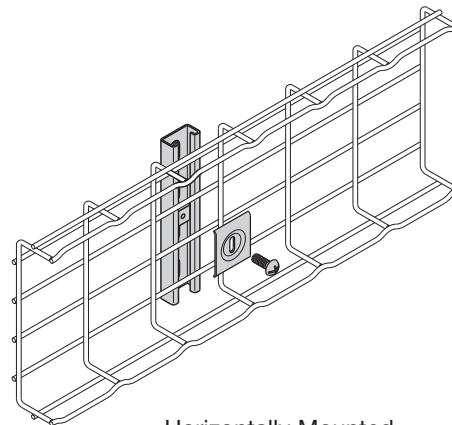



Horizontally Mounted

FLEXTRAY™ - Wall Support Methods



C Brackets

- Tab can be used for hold down (stainless steel will not have these tabs)
- For use with 4" (100mm) to 12" (300mm) wide trays
- C Bracket attaches to hard ceiling types
- All brackets are 7⁷/₈" (200mm) tall
- Cables can be side loaded
- L Brackets (page FLX-26) and C Brackets can be combined for layered tray runs
- Finishes __: **EG**, BLE, HD

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
4 C BRKT__	4" (100mm) C Bracket	1	1.2	0.54
8 C BRKT__	8" (200mm) C Bracket	1	1.4	0.63
12 C BRKT__	12" (300mm) C Bracket	1	1.9	0.86

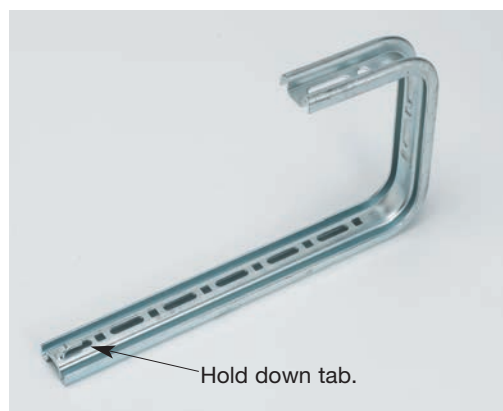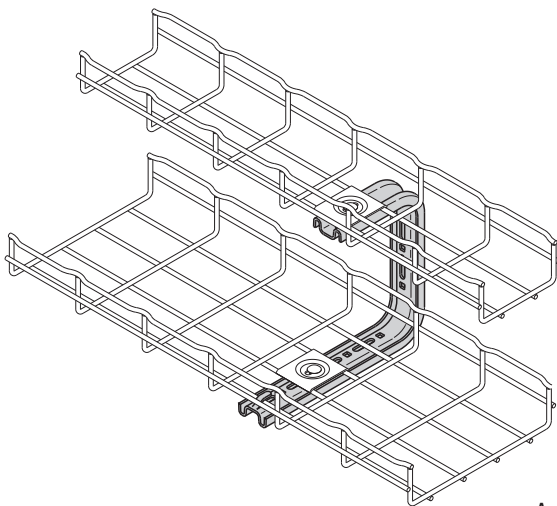

Assemble with
SUPT WASHER &
FTHDWE 1/4.

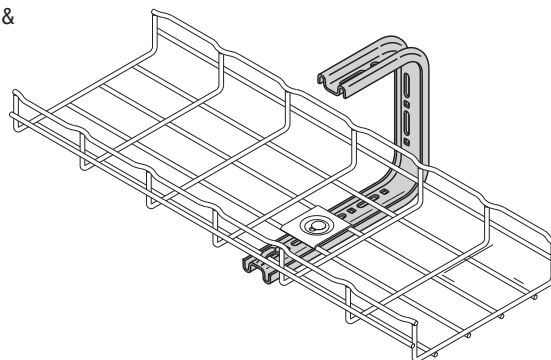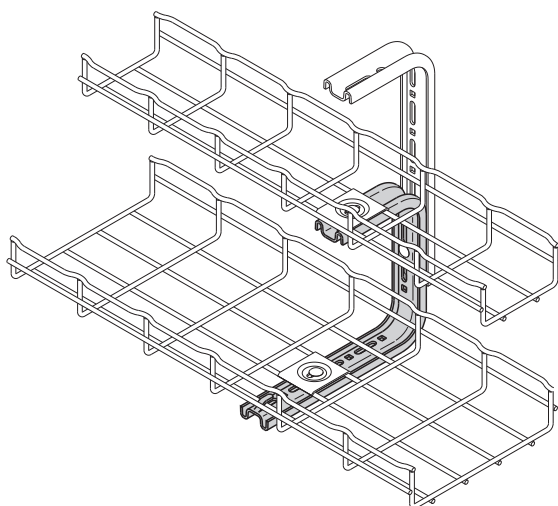

FLEXTRAY

See page FLX-3 for finish information

FLEXTRAY™ - F.A.S.T.™ Underfloor System

The F.A.S.T. System is an innovative and flexible way to support and manage cables in raised floor applications. This Foldable, Adjustable, Stackable, Tool-less System uses FLEXTRAY, stands, and accessories to provide a variety of options for your project and the fastest installation time on the market. Best of all, it does not attach to the raised floor structure and can be installed either before or after floor is in place.






FLEXTRAY

FLEXTRAY™ - F.A.S.T.™ Underfloor System

F.A.S.T. System Flextray

- Rounded ends on all wires
- UL Classified (see technical data for details)
- Depths: 2", 4", & 6" nominal
- Lengths: 24", 48", & 118"
- Use flat fitting (WBUFLT) for turns
- Wire Diameter: 0.191" (4.9mm)
- Standard finishes: **GLV**

Consult customer service for other available finishes

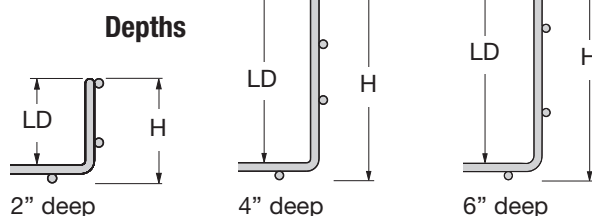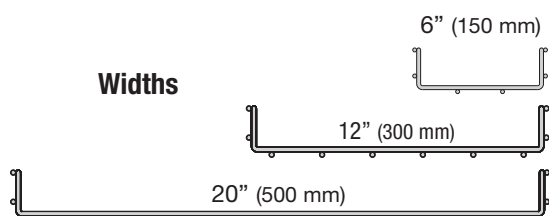


	Part Number	Width		Length		LD		H		Wt. Per Pc.	
		in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
2" (50mm) deep	FTU2X6X2	6	150	23.9	603	2.38	60	2.77	70	2.03	0.92
	FTU2X6X4	6	150	47.5	1206	2.38	60	2.77	70	3.95	1.79
	FTU2X6X10	6	150	118.4	3008	2.38	60	2.77	70	9.72	4.41
	FTU2X12X2	12	300	23.9	603	2.38	60	2.77	70	2.99	1.36
	FTU2X12X4	12	300	47.5	1206	2.38	60	2.77	70	5.82	2.64
	FTU2X12X10	12	300	118.4	3008	2.38	60	2.77	70	14.32	6.50
	FTU2X20X2	20	500	23.9	603	2.38	60	2.77	70	4.28	1.94
	FTU2X20X4	20	500	47.5	1206	2.38	60	2.77	70	8.33	3.78
	FTU2X20X10	20	500	118.4	3008	2.38	60	2.77	70	20.45	9.28
4" (100mm) deep	FTU4X6X2	6	150	23.9	603	4.38	111	4.77	121	2.67	1.21
	FTU4X6X4	6	150	47.5	1206	4.38	111	4.77	121	5.20	2.36
	FTU4X6X10	6	150	118.4	3008	4.38	111	4.77	121	12.79	5.80
	FTU4X12X2	12	300	23.9	603	4.38	111	4.77	121	3.64	1.65
	FTU4X12X4	12	300	47.5	1206	4.38	111	4.77	121	7.08	3.21
	FTU4X12X10	12	300	118.4	3008	4.38	111	4.77	121	17.39	7.89
	FTU4X20X2	20	500	23.9	603	4.38	111	4.77	121	4.93	2.24
	FTU4X20X4	20	500	47.5	1206	4.38	111	4.77	121	9.58	4.35
	FTU4X20X10	20	500	118.4	3008	4.38	111	4.77	121	23.52	10.67
6" (150mm) deep	FTU6X6X2	6	150	23.9	603	6.38	162	6.77	172	3.32	1.51
	FTU6X6X4	6	150	47.5	1206	6.38	162	6.77	172	6.45	2.93
	FTU6X6X10	6	150	118.4	3008	6.38	162	6.77	172	15.85	7.19
	FTU6X12X2	12	300	23.9	603	6.38	162	6.77	172	4.28	1.94
	FTU6X12X4	12	300	47.5	1206	6.38	162	6.77	172	8.33	3.78
	FTU6X12X10	12	300	118.4	3008	6.38	162	6.77	172	20.45	9.28
	FTU6X20X2	20	500	23.9	603	6.38	162	6.77	172	5.57	2.53
	FTU6X20X4	20	500	47.5	1206	6.38	162	6.77	172	10.83	4.91
	FTU6X20X10	20	500	118.4	3008	6.38	162	6.77	172	26.59	12.06
Flats	WBUFLT	20	500	24	604	-	-	-	-	2.96	1.34
	WBUFLT-12	12	250	24	604	-	-	-	-	1.50	0.68
	WBUFLT-06	6	150	24	604	-	-	-	-	1.00	0.45


See page FLX-3 for finish information

FLEXTRAY™ - F.A.S.T.™ Underfloor System


Stands

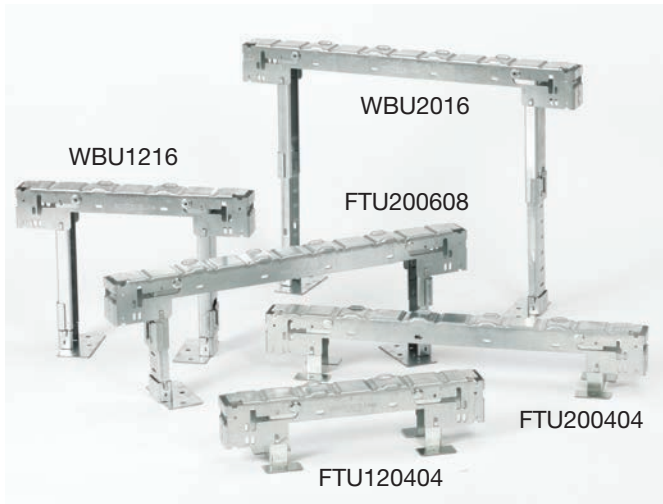

- No tools required for installation
- Formed top surface free of protrusions or sharp edges
- Up to 6" height adjustment
- Inside and outside leg positioning
- Folded and boxed for ease in shipping
- Patent Pending
- Stand part number includes:
 - one (1) stand
 - two (2) feet
 - two (2) adhesive pads
 - two (2) hold down clips
- Standard finish: Pre-Galvanized

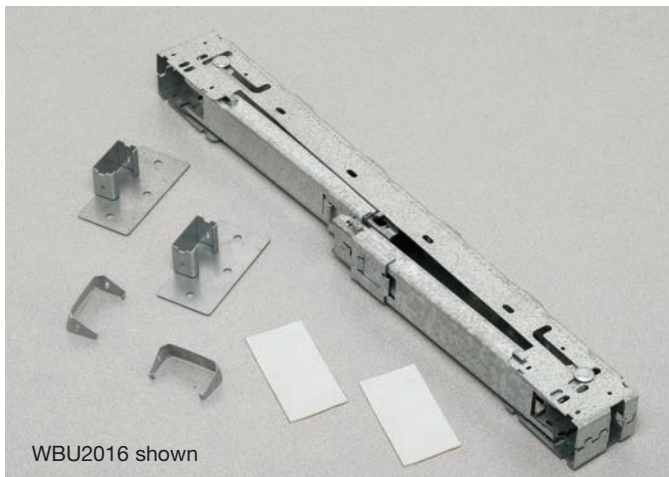

WBU2016 shown

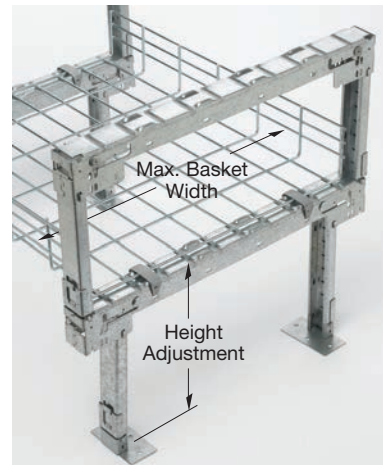

WBU2016 stands shown in double tier application.
Feet and adhesive pads not required for second tier assembly.

Part Number	Max. Basket Width		Height Adjustment		Stands Per Box	Wt. Per Box	
	in.	mm	in.	mm		lbs.	kg
FTU120404	12	300	4	101	2	1.82	0.82
FTU120608	12	300	6-8	152-203	2	2.79	1.26
WBU1216	12	300	10-16	254-406	2	7.44	3.37
WBU1224 *	12	300	18-24	457-609	2	9.06	4.11
WBU1231 *	12	300	25-31	635-787	2	10.52	4.77
FTU200404	20	500	4	101	2	2.34	1.06
FTU200608	20	500	6-8	152-203	2	3.36	1.52
WBU2016	20	500	10-16	254-406	2	8.56	3.88
WBU2024	20	500	18-24	457-609	2	10.20	4.62
WBU2031 *	20	500	25-31	635-787	2	11.64	5.28

* Legs are packed separately in box and not inserted in stand.

FLEXTRAY™ - F.A.S.T.™ Underfloor System

Cantilever Kits & Accessories



- No tools required for installation
- Simple design for tiered applications
- Available in kits or individual parts
- Adjustable shelf height
- Formed top surface has no sharp edges
- Can be installed independent of raised floor
- Standard finish: Pre-Galvanized



Adjustability of shelf brackets

WBUC812 Double Tier Cantilever Kit Shown with WBU2016 Stand



- WBUC12 - Single Tier Cantilever Kit**
Includes
- (1) WBUCB12
 - (1) WBUL16
 - (1) WBUCF
 - (2) WBUHD





- WBUC812 - Double Tier Cantilever Kit**
Includes
- (1) WBUCB8
 - (1) WBUCB12
 - (1) WBUL24
 - (1) WBUCF
 - (3) WBUHD



WBUCB8



WBUCB12

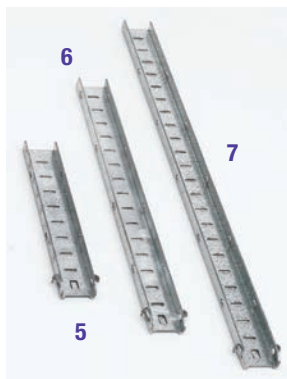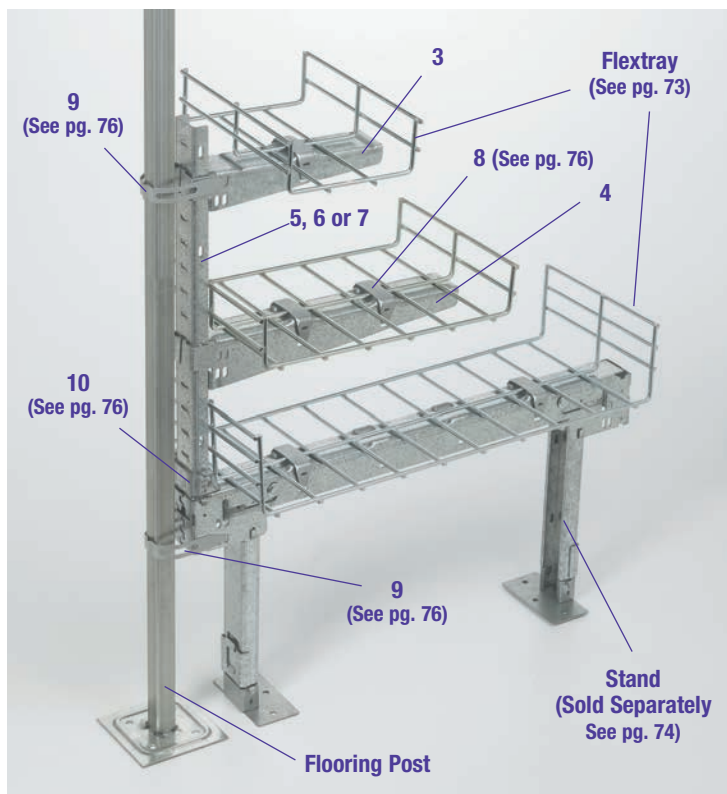

Part Number	Item #	Description	Max Height †		Box Qty.	Wt. Per Box	
			in.	mm		lbs.	kg
WBUC12 *	1 ^Δ	Cantilever Kit - Single Tier with 12" Bracket	7.30	185	10	15.62	7.08
WBUC812	2 ^Δ	Cantilever Kit - Double Tier with 8" & 12" Brackets	15.25	387	10	25.40	11.52
WBUCB8	3	8" Cantilever Bracket for 6" Flextray	-	-	10	5.51	2.50
WBUCB12	4	12" Cantilever Bracket for up to 12" Flextray	-	-	10	9.16	4.15
WBUL16	5	Short Vertical Support	7.30	185	10	4.37	1.98
WBUL24	6	Medium Vertical Support	15.25	387	10	8.45	3.83
WBUL31	7	Tall Vertical Support	22.25	565	10	12.07	5.47

* For use with 2" and 4" deep Flextray on the lower level.

† Height - from top of stand

^Δ Stand not included


See page FLX-3 for finish information

FLEXTRAY™ - F.A.S.T.™ Underfloor System

Hold Down Clip



- Spring steel clip to attach Flextray to stands
- No tools required for installation
- Holds both continuous and spliced wire sections securely
- Works with stands and cantilever brackets

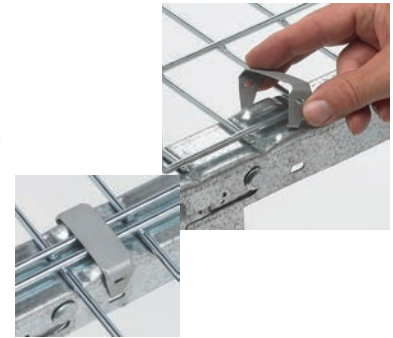

Part Number	Item #	Description	Box Qty.	Wt. Per Box	
				lbs.	kg
WBUHD	8	Basket Clip	50	1.10	0.50

Pedestal Clip



- Optional spring steel clip to give added rigidity to system
- Works with stands and cantilever brackets



Part Number	Item #	Description	Box Qty.	Wt. Per Box	
				lbs.	kg
WBUPC	9	Pedestal Clip	50	1.65	0.75

Cantilever Foot




- Secures vertical support into stand top
- Only required when stand legs are in the inner position




Part Number	Item #	Description	Box Qty.	Wt. Per Box	
				lbs.	kg
WBUCF	10	Cantilever Foot	50	8.65	3.92

Under Floor Stand

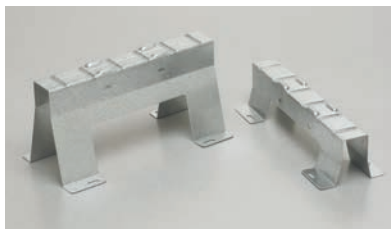

- Heights of 3", 4", 5" or 6"
- Leg cutout allows for airflow
- No tools required to mount FLEXTRAY to stand
- Use WBUHD hold down clips to secure basket
- Stand width is 12"
- Fasten to floor for maximum stability
- Floor mounting slot size: .313" (7.9mm) x .813" (20.6mm) for 1/4" hardware



Part Number	Overall Height		Wt. Per Each	
	in.	mm	lbs.	kg
WBU1203	3	76	1.32	0.60
WBU1204	4	101	1.60	0.72
WBU1205	5	127	1.88	0.85
WBU1206	6	152	2.17	0.98

L Bracket & Toolless Clip


- For use when access to ground floor is limited
- Use with round post sizes 0.9" (25mm) through 1.2" (30mm)
- Use with square posts
- Order clamps and brackets separately
- Built-in tab for hold down
- Tool-less Clip (plenum-rated material) - Snap-in locking pin securely holds basket to bracket



Illustration photos.
All parts are sold separately.



TOOLLESS CLIP

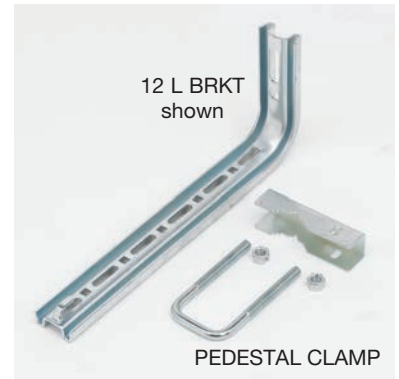

12 L BRKT
shown

PEDESTAL CLAMP

Part Number	Description	Qty.	Wt. Per Box	
			lbs.	kg
TOOLLESS CLIP	Tool-less Hold-Down Clip	50/Box	1.00	0.45

Brackets (Zinc Plated)


Part Number	System Width		Length		Box Qty.	Wt. Per Box	
	in.	mm	in.	mm		lbs.	kg
8 L BRKT	6-8	150-200	8	200	1	0.80	0.36
12 L BRKT	12	300	12	300	1	1.30	0.59

Pedestal Clamp & Kit


- Clamps to existing raised-access floor stanchion
- Use L BRKT (shown above) or full pedestal kit to support trays under the raised access floor (sold separately)
- For tray widths 2" (50mm) to 20" (500mm)
- *Pedestal Clamp Kit includes two (2) pedestal clamps, 28" (711mm) profile section, bolts & nuts
- Kits include hardware
- SUPTWASHER & FTHDWE 1/4 sold separately
- Finishes __: **EG**



Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
PEDESTAL CLAMP__	Pedestal Clamp	1	0.6	0.27
PEDESTAL KIT__	Pedestal Clamp Kit	1*	3.3	1.49

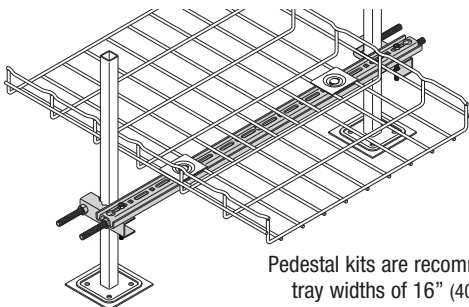

Pedestal kits are recommended for tray widths of 16" (400mm) or greater

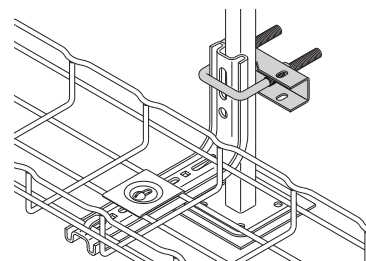


See page FLX-3 for finish information

FLEXTRAY™ - F.A.S.T.™ Underfloor System

Under Floor Support Bracket



- Under Floor Support Bracket provides rugged support for FLEXTRAY System from access floor post.
- To complete the installation, the following hardware must be ordered separately.
 - (2) - B501 U-Bolts
 - (1) - SUPT WASHER Hold Down
 - (1) - 1/4"-20 x 1" Slotted Head Screw
 - (1) - N224WO Channel Nut
- Finish: **ZN**

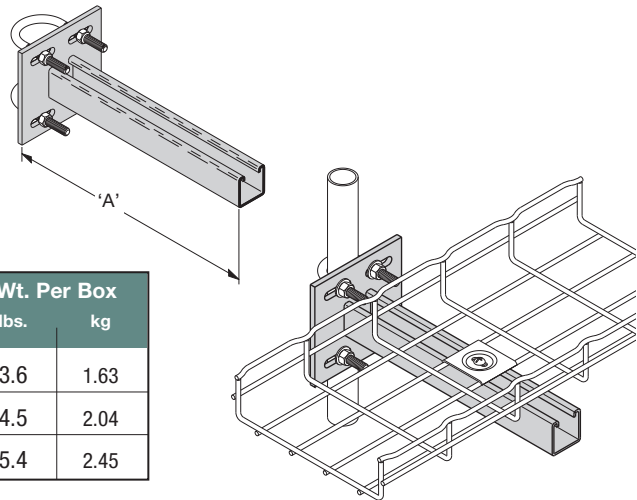


Part Number	'A'		Thread		Box Quantity	Wt. Per Box	
	in.	mm	in.	mm		lbs.	kg
B409UF-12	12"	300	12"	300	1	3.6	1.63
B409UF-18	18"	450	18"	450	1	4.5	2.04
B409UF-21	21"	533	21"	533	1	5.4	2.45


U-Bolts



- Designed for attachment of Under Floor Support Brackets to access floor post. Each U-Bolt includes two (2) hex nuts.
- Finish: **ZN**




Part Number	'A'		Thread Size	Box Quantity	Wt. Per Box	
	in.	mm			lbs.	kg
B501-1	1 ³ / ₈ "	30	5/16"-18	50	7.0	3.17
B501-1¹/₂	2"	50	5/16"-18	50	8.0	3.63
B501-2	2 ⁷ / ₁₆ "	62	3/8"-16	20	5.4	2.45
B501-2¹/₂	2 ¹⁵ / ₁₆ "	75	3/8"-16	25	8.0	3.63



FLEXTRAY™ - F.A.S.T.™ Underfloor System


- Attaches up to #1 ground wire to each tray section when separate ground wire is required
- Used for UL grounding compliance.
- When using color powder coated finish or paint, coating must be removed at the points of contact.
- Finish: Copper Plated

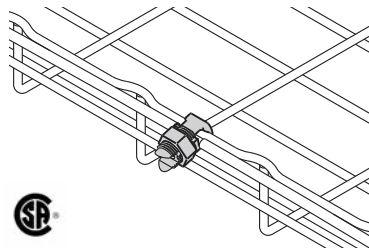


Ground Bolt



Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
GROUND BOLT	Ground Bolt	1	0.11	0.05

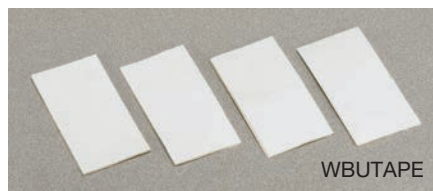

Adhesive & Feet




- WBUTAPE - Double-sided adhesive pads for temporary positioning of floor stands
Pad Size: 2" (50mm) X 4" (100mm)
- WBUFA - Adhesive to secure stand to floor

Part Number	Description	Box Qty.	Wt. Per Box	
			lbs.	kg
WBUF	Stand Foot	10	2.36	1.07
WBUTAPE	Double-Sided Tape	50	2.50	1.13
WBUFA	Floor Adhesive	1 Gallon	10.78	4.89


Floor Stand

- Non-metallic snap lock floor stand is designed for use under access floors.
- Floor stand elevates FLEXTRAY System 1⁵/₈" (41.3mm) above the floor.
- To attach floor stand, use Liquid Nails™ or anchors.
- Elevation increments of 1³/₈" (35mm) can be obtained by stacking floor stands.
- Sized for 1/4" hardware (order separately).
- Material: Black Plenum-rated Plastic

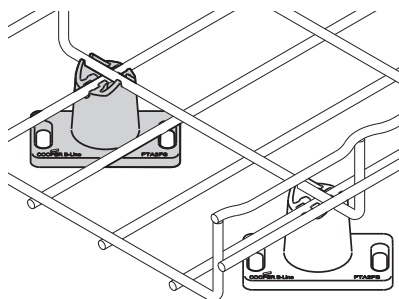

Part Number	Wt. Per Pc.		Box Quantity
	lbs.	kg	
FTA2FS	0.44	0.20	10


See page FLX-3 for finish information

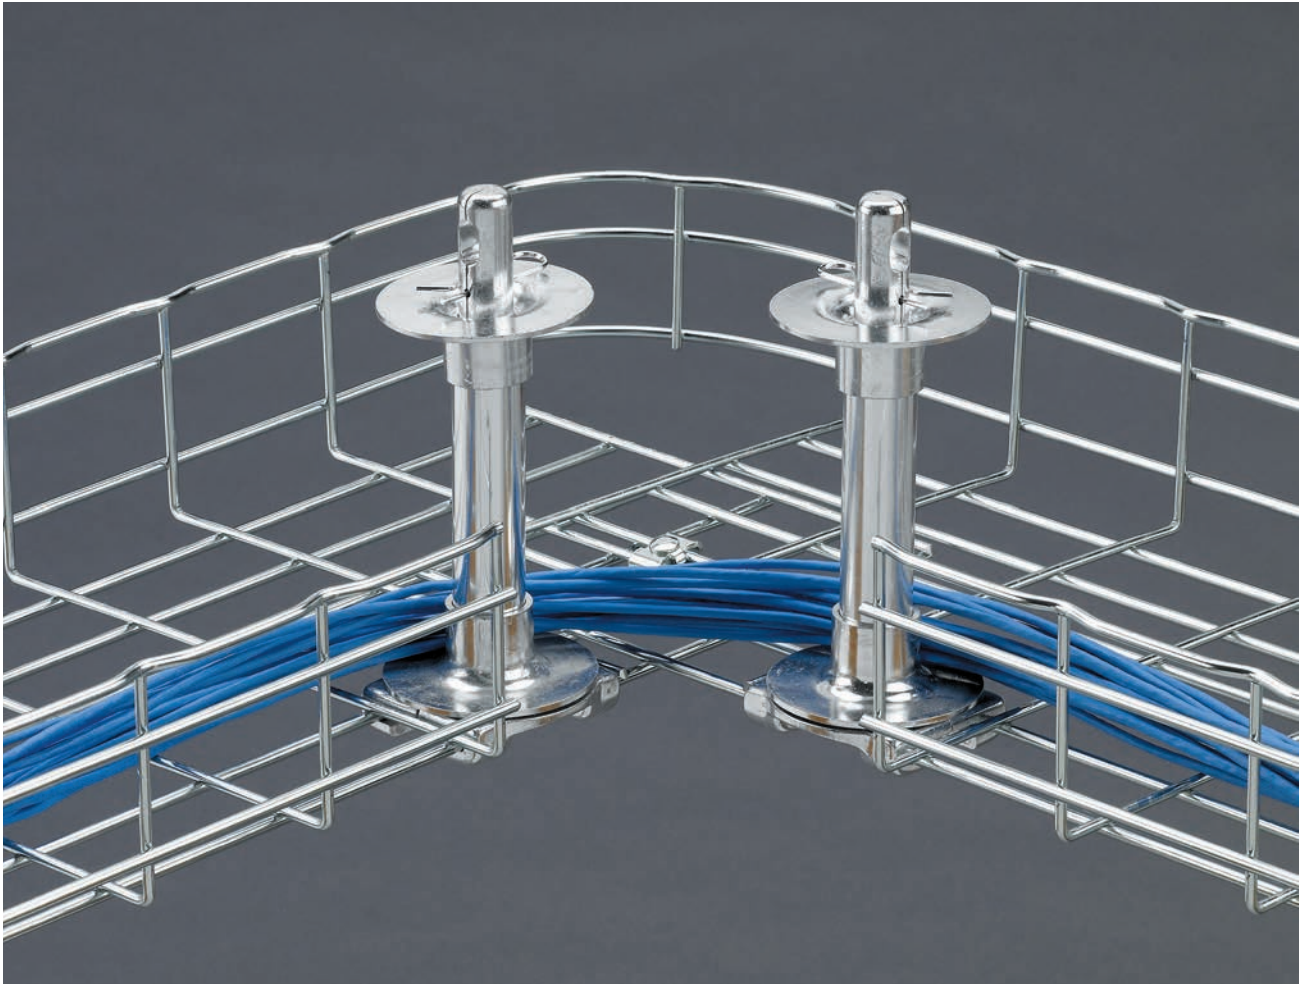

FLEXTRAY

Covers

- Protects cable from debris and dust
- Adds security to cable installation
- Easy bend-over tabs secure cover to trays
- Available for 2" (50mm) to 24" (600mm) wide trays
- Comes in 118" (2997mm) length
- Finishes __: **GS**, BLE, 304S, 316S

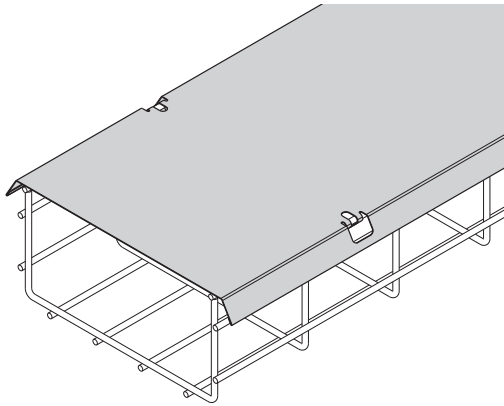

Part Number	Use With Tray Width	Qty./Box	Wt./Box	
			lbs.	kg
2 IN COVER__	2" (50mm)	1	3.8	1.72
4 IN COVER__	4" (100mm)	1	5.7	2.58
6 IN COVER__	6" (150mm)	1	6.7	3.04
8 IN COVER__	8" (200mm)	1	8.7	3.94
12 IN COVER__	12" (300mm)	1	11.6	5.26
16 IN COVER__	16" (400mm)	1	15.6	7.07
18 IN COVER__	18" (450mm)	1	17.0	7.71
20 IN COVER__	20" (500mm)	1	18.5	8.39
24 IN COVER__	24" (600mm)	1	22.0	9.98






Dividers

- Allows cable separation within a single tray
- Hemmed/rounded edge provides cable jacket safety
- Hardware included
- Field miter for bends and turns
- Dual slots every 24" (609mm) for field cutting
- Available in 2" (50mm), 4" (100mm) and 6" (150mm) heights
- Comes in 118.125" (3000mm) length
- Finishes __: **GS**, BLE, 304S, 316S

Part Number	Use With Tray Depth	Qty./Box	Wt./Box	
			lbs.	kg
2 IN DIVIDER__	2" (50mm) Deep	1	3.5	1.59
4 IN DIVIDER__	4" (100mm) Deep	1	9.6	4.35
6 IN DIVIDER__	6" (150mm) Deep	1	14.5	6.58

Dividers include hardware shown below

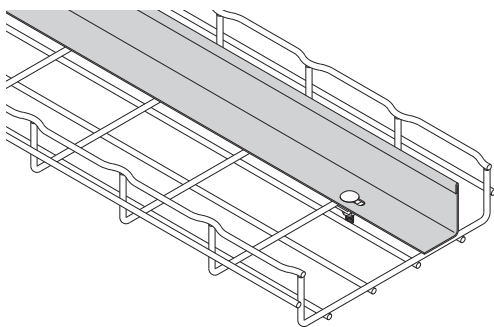

See page FLX-3 for finish information


Solid Bottom Inserts

Part Number	Use With Tray Width	Qty./Box	Wt./Box	
			lbs.	kg
INSERT 4X118__	4" (100mm)	1	6.8	3.08
INSERT 6X118__	6" (150mm)	1	9.8	4.44
INSERT 8X118__	8" (200mm)	1	13.3	6.03
INSERT 12X118__	12" (300mm)	1	21.6	9.80
INSERT 16X118__	16" (400mm)	1	26.4	11.97
INSERT 18X118__	18" (450mm)	1	32.4	14.69
INSERT 20X118__	20" (500mm)	1	32.9	14.92
INSERT 24X118__	24" (600mm)	1	39.3	17.82


Attach with
FTHDWE 1/4 &
Top Washer



- Continuous support for sensitive cables
- Security of cable in high-traffic areas
- Hardware included
- Available for 2" (50mm) to 24" (600mm) wide trays
- Comes in 118" (2997mm) length
- Finishes __: **GS**, BLE, 304S, 316S



Attachment
methods

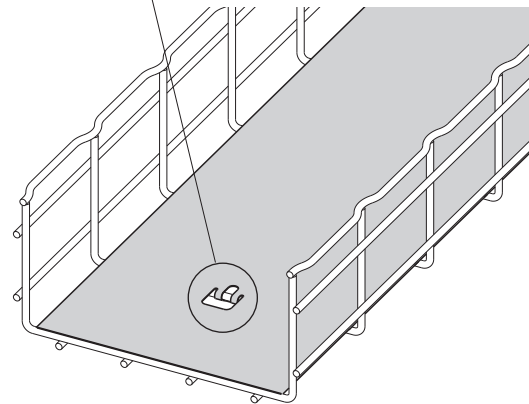



Blind Ends

Part Number	'A'		Height		Box Quantity
	in.	mm	in.	mm	
FT BE 2X2	2"	50	2"	50	1
FT BE (*)X4	4"	100	(*)	(*)	1
FT BE (*)X6	6"	150	(*)	(*)	1
FT BE (***)X8	8"	200	(*)	(*)	1
FT BE (***)X12	12"	300	(**)	(**)	1
FT BE (***)X16	16"	400	(**)	(**)	1
FT BE (***)X18	18"	450	(**)	(**)	1
FT BE (***)X20	20"	500	(**)	(**)	1
FT BE (***)X24	24"	600	(**)	(**)	1

- Forms a closure for a dead-end FLEXTRAY
- Hardware included
- Finish: **GLV**, SS6

(*) Insert: 2 = 2" (50 mm), 4 = 4" (100 mm) for height


(**) Insert: 2 = 2" (50 mm), 4 = 4" (100 mm),
6 = 6" (150 mm) for height

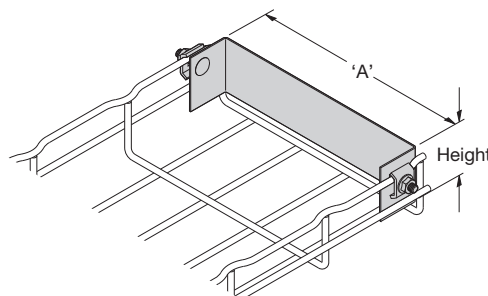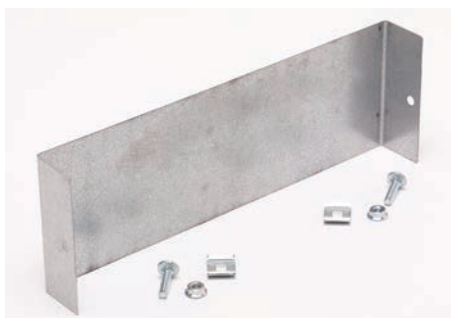

Cable Roller

- Protects and maintains recommended cable radii for Cat 5, Cat 5E, Cat 6, Cat 6A, Fiber, etc.
- Height of roller can be adjusted to tray depth
- Installs in seconds with no tools
- Reduces cable installation time
- Prevents migration of cables
- For use with 4" (100mm) to 32" (800mm) tray widths
- Finish: Cast Aluminum

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
CABLE ROLLER	Cable Roller	1	1.0	0.45

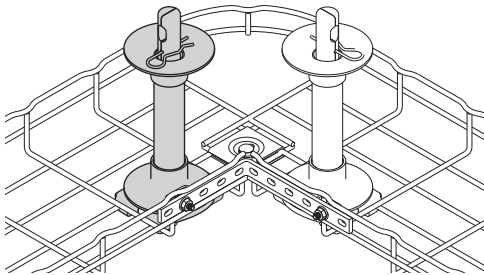


Quick, snap-together design

- Securely holds tray to support
- Snap-in locking pin
- No tools or fastening required
- Fastest hold-down method available
- For use with the following:
 - FTB_CS (see pg. 67)
 - L BRKT (see pg. 67)
 - C BRKT (see pg. 71)
- Finish: Plenum rated resin (black)

Toolless Clip


Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
TOOLLESS CLIP	Toolless Hold-Down Clip	50	1.0	0.45

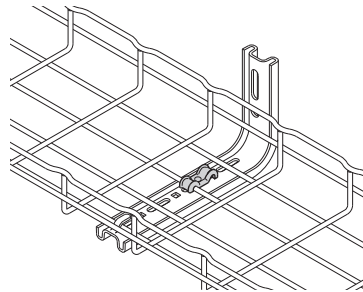

- Use to secure FLEXTRAY to horizontal strut support
- Designed for use as shown in drawing (no load rating)
- Finish: Black Zinc Phosphate

Strut Mounting Clip

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
BW4	Strut Mounting Clip	100	0.9	0.41

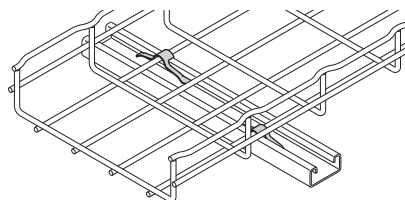



See page FLX-3 for finish information

FLEXTRAY™ - Accessories

Drop Out Fitting

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
DROP OUT__	Drop Out Fitting	50	15.0	6.8


- Keeps cable radius secure at drop point
- For use with 4" (100mm) to 32" (800mm) wide trays
- Attaches to tray without hardware
- Drop outs can be attached at bottom, side or ends of tray
- Hold down tabs on bottom of drop out to secure tray
- Finishes __: **EG**, BLE, SS6

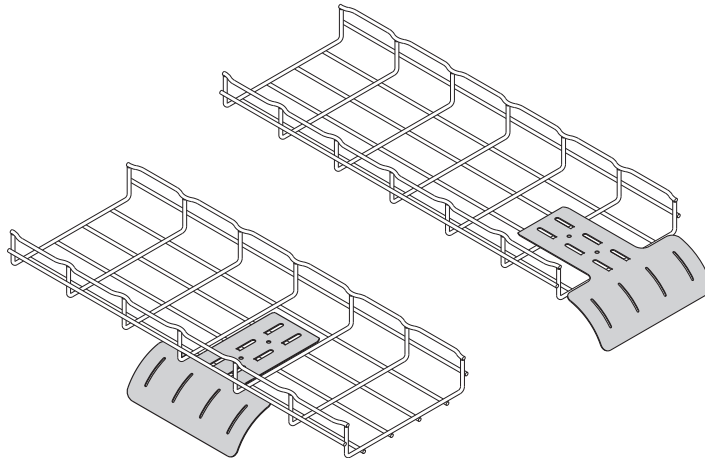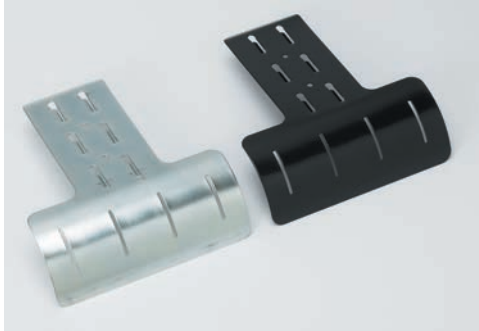

Cable Drop Out


Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTA2D0	Cable Drop Out	10	0.17	0.08

- Non-metallic 2" (50mm) radius Cable Drop-Out snap locks into mesh bottom and protects cables from sharp bend
- Material: Black Plenum-rated Plastic

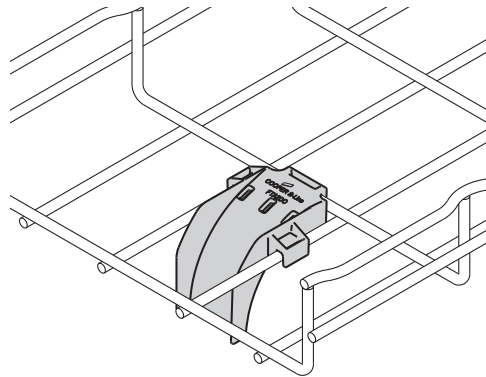

Conduit Connector

- Conduit connector is designed to connect conduit to the side or bottom of FLEXTRAY
- Conduit bushing will remain outside of tray to keep cable pathway clear
- Bend tabs to secure connector to tray
- No hardware included
- Finishes __: **GLV**

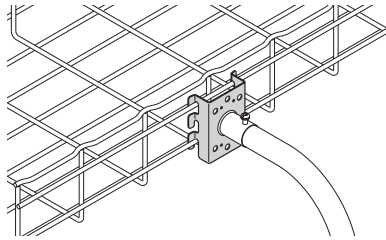


Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
FTA050CC __	1/2" (15mm) Conduit Clip	10	2.0	0.91
FTA075CC __	3/4" (20mm) Conduit Clip	10	2.0	0.91
FTA100CC __	1" (25mm) Conduit Clip	10	2.0	0.91
FTA125CC __	1 1/4" (32mm) Conduit Clip	10	2.0	0.91



Rack Clamp

- Securely holds tray down to rack
- Installs without drilling
- Black-painted finish to match rack
- Finish __: **BLE**

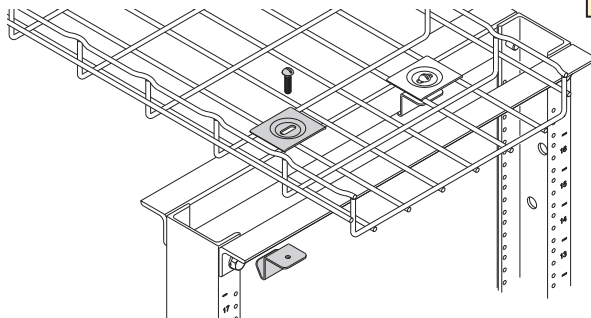


Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
RACK CLAMP __	Rack Clamp	4	4.7	2.13



Adaptor Kit

- Adaptor kit includes all hardware necessary to connect Flextray system to top of relay rack at right angle or parallel position
- Finish __: **YZN (Yellow Zinc Chromate)**

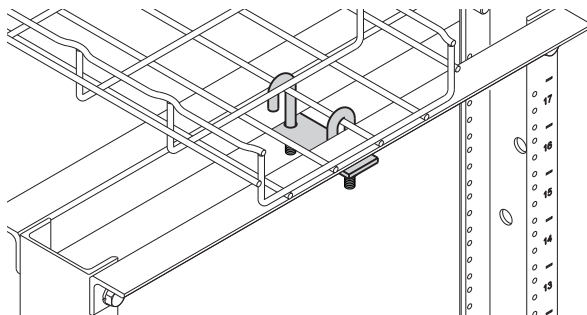

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
SB2204 __	Adaptor Kit	1	0.37	0.17

Adaptor Kit includes:

- (1) - Mounting Plate
- (2) - 5/16"-18 x 2" "J"-Bolts
- (2) - HN 5/16"-18 Hex Nuts
- (2) - LW 5/16" Lock Washers





See page FLX-3 for finish information

Radius Shield

Part Number	Description		Qty./Box	Wt./Box	
	in.	mm		lbs.	kg
FTA2RS	2.5	63	50	4.0	1.8
FTA4RS	4.3	110	50	7.0	3.2
FTA6RS	5.9	150	25	5.0	2.3


- Provides a smooth inside radius surface.
- No tools or fasteners needed to install.
- Sizes for 2", 4" & 6" deep FLEXTRAY; 90° horizontal bends, tees, and crosses.
- Installs in seconds. Simply hold in place and bend back tabs.
- Slick surface to reduce cable friction.
- Material: Black Polycarbonate

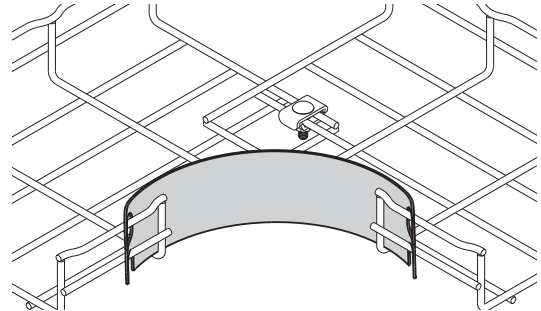

Rubber Cap

Part Number	Box Quantity	Wt. Per 100	
		lbs.	kg
B719EB	100	0.20	0.10

- Install on wire ends if required. Fits all wire diameters

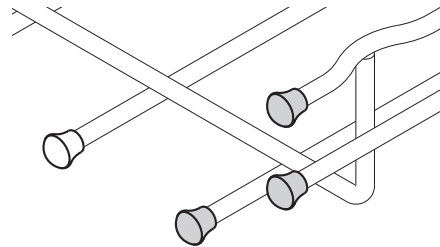


Touch-Up Paint

Part Number	Color	Box Quantity	Wt. Per Pc.	
			lbs.	kg
SB420ATG	Gray Lacquer	1	0.9	0.41
SB420AFB	Flat Black Lacquer	1	0.9	0.41
SB420ACW	Computer White Lacquer	1	0.9	0.41
B999	Silver Zinc-Rich Paint	1	0.9	0.41

- Size: 12 ounce aerosol can
- Cannot ship air freight

Label Clip

- Clips easily into trays
- Use for identifying your cable pathways
- Can be used on all tray sizes
- Will not fit on side of 1 1/2" deep FLEXTRAY
- Finish: Non-plenum-rated resins

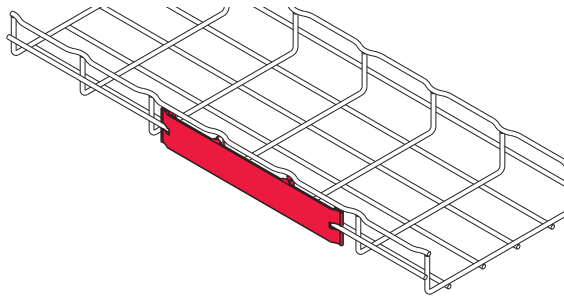


Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
LABEL CLIP	10 1/2" (267mm) Long	10	0.6	0.27



Ground Bolt

- Attaches up to #1 ground wire to each tray section when separate ground wire is required
- Used for UL grounding compliance.
- When using color powder coated finish or paint, coating must be removed at the points of contact.
- Finish: Copper Plated

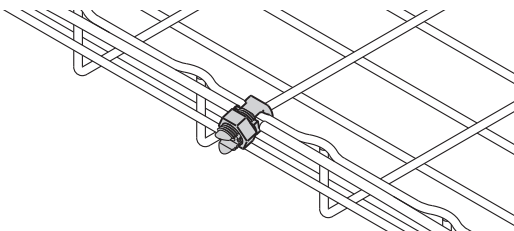


Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
GROUND BOLT	Ground Bolt	100	1.0	0.45



Ground Wire Supports

- Supports ground wire along side of tray
- Can be used on all trays
- Finish __: Zinc Plated

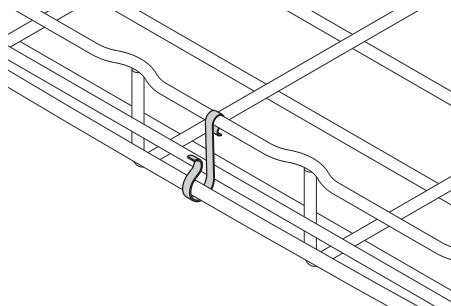

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
GROUND SUPT GL	Ground Wire Support	100	0.6	0.27



See page FLX-3 for finish information

FLEXTRAY™ - Accessories

- Complete source of hardware for ceiling connections
- Available in stock
- Strut can be purchased in pre-cut lengths and various colors
- All hardware is zinc plated

Threaded Rod



Part Number	Size	Qty.	Wt./Qty.	
			lbs.	kg
ATR1/4x72	1/4" x 72" (1828mm)	1	0.7	0.31
ATR1/4x120	1/4" x 120" (3048mm)	1	1.2	0.54
ATR1/4x144	1/4" x 144" (3657mm)	1	1.4	0.63
ATR3/8x72	3/8" x 72" (1828mm)	1	1.7	0.77
ATR3/8x120	3/8" x 120" (3048mm)	1	2.9	1.31
ATR3/8x144	3/8" x 144" (3657mm)	1	3.5	1.58
ATR1/2x72	1/2" x 72" (1828mm)	1	3.2	1.45
ATR1/2x120	1/2" x 120" (3048mm)	1	5.4	2.45
ATR1/2x144	1/2" x 144" (3657mm)	1	6.5	2.95

Lock Washers



Part Number	Size	Qty.	Wt./Qty.	
			lbs.	kg
1/4LW	1/4"	200	0.6	0.27
3/8LW	3/8"	200	1.6	0.72
1/2LW	1/2"	200	2.0	0.91

Flat Washers



Part Number	Size	Qty.	Wt./Qty.	
			lbs.	kg
1/4FW	1/4"	200	1.2	0.54
3/8FW	3/8"	200	3.0	1.36
1/2FW	1/2"	200	6.6	2.99

Rod Couplings



Part Number	Size	Qty.	Wt./Qty.	
			lbs.	kg
B655-1/4	1/4"-20	50	2.0	0.91
B655-3/8	3/8"-16	50	5.5	2.49
B655-1/2	1/2"-13	50	6.0	2.72

Square Washers



Part Number	Hole Size	Qty.	Wt./Qty.	
			lbs.	kg
B201	7/16	50	6.0	2.72
B202	9/16	50	7.0	3.17

Hex Nuts



Part Number	Size	Qty.	Wt./Qty.	
			lbs.	kg
1/4HN	1/4"-20	100	0.6	0.27
3/8HN	3/8"-16	100	1.6	0.72
1/2HN	1/2"-13	100	4.3	1.95

Beam Clamps



Part Number	Size	Qty.	Wt./Qty.	
			lbs.	kg
B3036L-3/8	3/8"-16	100	60.0	27.2
B3036L-1/2	1/2"-13	100	140.0	63.5

Beam Clamps



Part Number	Size	Qty.	Wt./Qty.	
			lbs.	kg
B444-1/4	1/4"-20	100	160	72.5
B444-3/8	3/8"-16	100	430	195.0
B444-1/2	1/2"-13	100	430	195.0

U-Bolt Clamps




Part Number	Size	Qty.	Wt./Qty.	
			lbs.	kg
B441-22	3/8"-16 x 3 3/8" long	100	160	72.5

Spring Nuts



Part Number	Thread Size	Qty.	Wt./Qty.	
			lbs.	kg
N224	1/4"-20	100	6.5	2.95
N228	3/8"-16	100	9.3	4.22
N225	1/2"-13	100	11.3	5.12

Bolted Framing



Part Number	Channel Size	Qty.	Wt./Qty.	
			lbs.	kg
B22SGALV120	1 5/8" x 120" - 12 ga.	1	6.0	2.72
B22SHGALV120	1 5/8" x 120" - 12 ga.	1	6.0	2.72
B56SGALV120	1 3/16" x 120" - 15 ga.	1	7.0	3.17
B56SHGALV120	1 3/16" x 120" - 15 ga.	1	6.0	2.72

Concrete Rapid Rod Hanger



Part Number	Rod Size	Shank Size	Qty.	Wt./Qty.	
				lbs.	kg
ARC-37-150	3/8"	1/4" x 1 1/2"	100	3.4	1.54

Wood Rapid Rod Hanger



Part Number	Rod Size	Shank Size	Qty.	Wt./Qty.	
				lbs.	kg
ARW-37-200	3/8"	1/4" x 2"	100	3.4	1.54
ARW-37-200SW	3/8"	1/4" x 2"	100	3.4	1.54

SW = Side Mount

Steel Rapid Rod Hanger



Part Number	Rod Size	Shank Size	Qty.	Wt./Qty.	
				lbs.	kg
ARS-37-150	3/8"	1/4" x 1 1/2"	100	3.4	1.54
ARS-37-150SW	3/8"	1/4" x 1"	100	3.4	1.54



SW = Side Mount

Sockets for Rapid Rod Hangers

Part Number	Hole Size	Qty.	Wt./Qty.	
			lbs.	kg
7187	Universal Steel & Wood Socket	1	4.5	2.04
7197	3/8" Concrete Socket	1	4.5	2.04

See page FLX-3 for finish information

FLEXTRAY™ - Installation

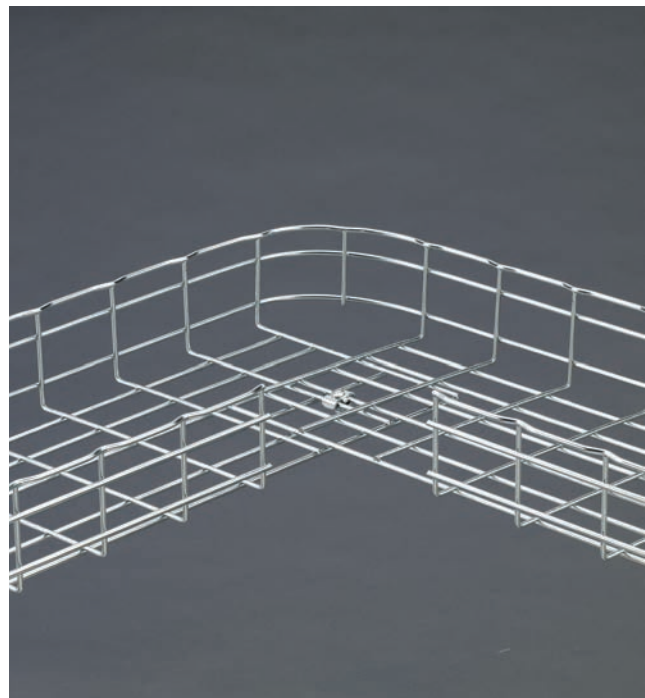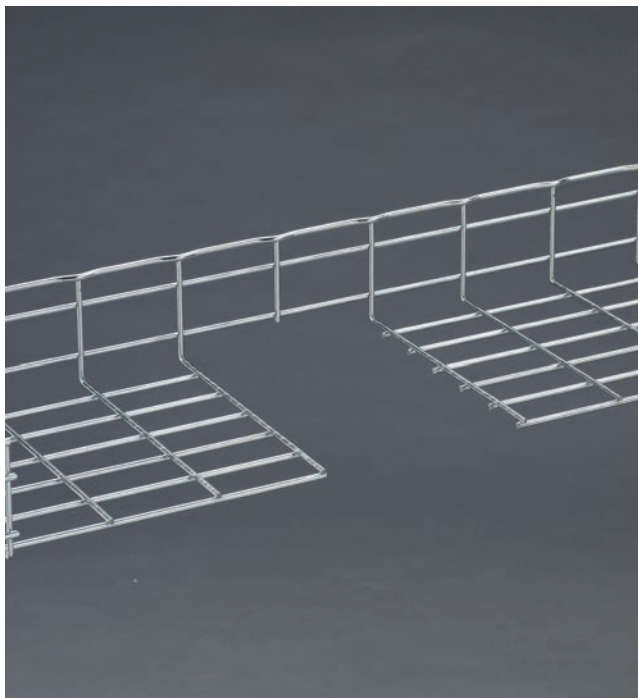

FLEXTRAY

Flextray Cutters

- Exclusive, patented CLEANSHEAR™ cuts tray fast
- No sharp edges
- Designed specifically for cutting Flextray
- Safely cut and bend Flextray into any configuration

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
CLEANSHEAR	CLEANSHEAR Cutting Tool	1	4.3	1.95



Patented



1 Face tray up. Slide cutter next to vertical wire and cut.



2 Turn tray to the side with open side facing you. Repeat step 1 to cut wire.



3 Finish cutting all side wires.



4 Turn tray open-side down and cut wires from bottom of tray.




5 Finish cutting by moving to other side of tray to cut remaining wires,

- CLEANSHEAR Bender has our exclusive bending attachment
- Makes bending larger trays easy
- Recommended for bending tray widths of 16" (400mm) or greater

Flextray Bender

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
CLEANSHEAR BEND	CLEANSHEAR Cutting Tool With Bender Attachment	1	5.4	2.45

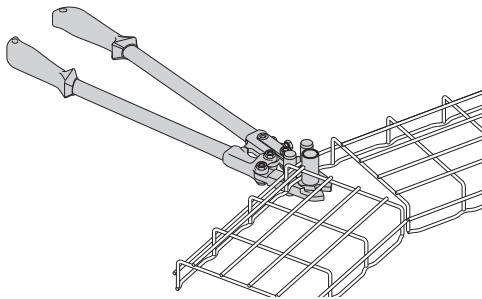

Patented




Airshear Cutter

- Fastest wire mesh cutter available
- 57% time savings over regular CLEANSHEAR
- Airshear is available when you have a large project to install. Call us for details.

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
AIRSHEAR	Pneumatic CLEANSHEAR Cutting Tool	1	9.0	4.08


Patented




FLEXTRAY™ - Installation

Angular Bolt Cutter

Part Number	Description	Qty./Box	Wt./Box	
			lbs.	kg
WB30BC	Bolt Cutter	1	6.8	3.1
WB30RB	Replacement Blade	1	1.3	0.6




WB30BC
Angular Bolt Cutter




WB30RB
Replacement Blade

Completely adaptable, B-Line Flextray is designed to accommodate jobsite changes. Cut wires with B-Line Angular Bolt Cutter, bend to create a bend, tee, or reducer.

Cut and remove each wire as illustrated below. Follow cutting pattern and blade positioning. Placing Flextray open side down provides the optimum cutting angle.

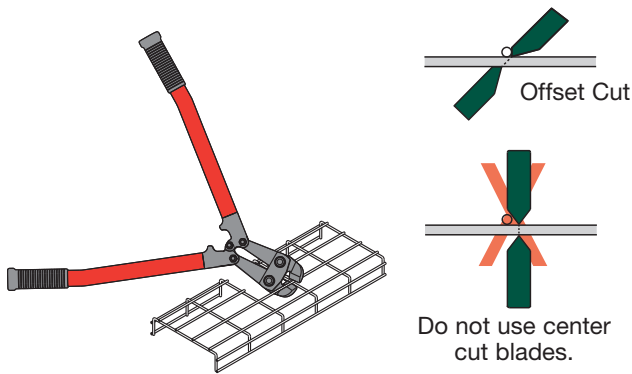

Cutting Order

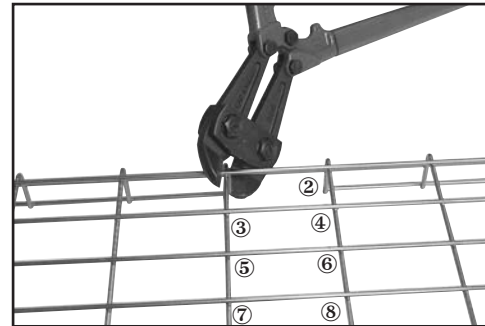

For the best results, use a WB30BC Angular Blade Offset Bolt Cutter with 24" (600 mm) long handles. The Offset Blade Cutter produces a clean cut. Position bolt cutter blades near the cross wire and perpendicular to wire to be cut (see illustration above). Proper cut will make the assembly faster, easier and safer while minimizing grinding.

FLEXTRAY

Part Number	Length		Wt. Per Cutter		Box Quantity
	in.	mm	lbs.	kg	
WB50WC	12 ³ / ₄ "	325	3.0	1.3	1

Part Number	Description	Box Quantity
WB50RB	Replacement Blade	1
WB50BA	Replacement Battery	1

The Greenlee cable wire cutter makes flush cuts without burrs. Will cut .191" diameter wire in 2 seconds. Cutting head rotates 330° for ease of positioning and the tool automatically retracts when cut is complete.


Comes with 2 batteries, charger, and carrying case. Approximately 250 cuts per charge.



See page FLX-3 for finish information


90° Horizontal Bends (Short Radius)

- Make your own field cut horizontal bends using CLEANSHEAR™ to make safe, smooth cuts
- Can be made from any tray width and depth with any available finish
- SUPT WASHER & FTHDWE 1/4 hardware may be used on bottom of tray instead of WASHER SPL KIT where desired

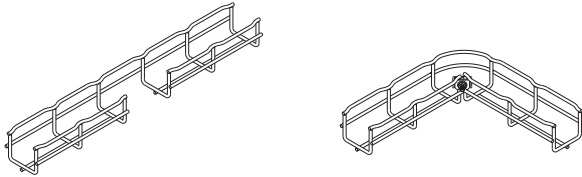


2" (50mm) Tray Width

Flextray Depth	Required Hardware Description	Quantity
2" (50mm)	WASHER SPL KIT	1

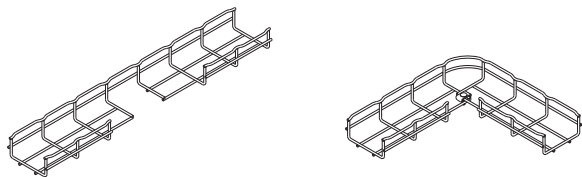


4" (100mm) Tray Width

Flextray Depth	Required Hardware Description	Quantity
1 1/2" (38mm)	WASHER SPL KIT	1
2" (50mm)	WASHER SPL KIT	1
4" (100mm)	WASHER SPL KIT	1

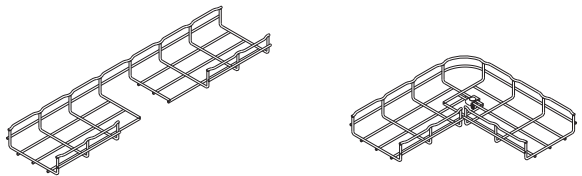


6" (150mm) Tray Width

Flextray Depth	Required Hardware Description	Quantity
1 1/2" (38mm)	WASHER SPL KIT	1
2" (50mm)	WASHER SPL KIT	1
4" (100mm)	WASHER SPL KIT	1

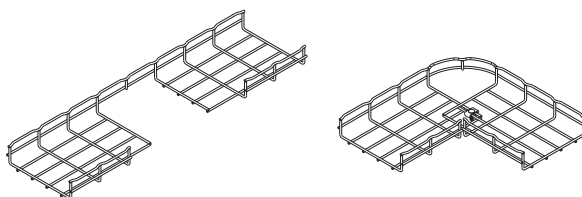

8" (200mm) Tray Width

Flextray Depth	Required Hardware Description	Quantity
1 1/2" (38mm)	WASHER SPL KIT	1
2" (50mm)	WASHER SPL KIT	1
4" (100mm)	WASHER SPL KIT	1
6" (150mm)	WASHER SPL KIT	1

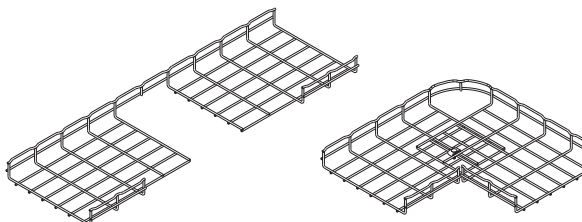

12" (300mm) Tray Width

Flextray Depth	Required Hardware Description	Quantity
1 1/2" (38mm)	WASHER SPL KIT	1
2" (50mm)	WASHER SPL KIT	1
4" (100mm)	WASHER SPL KIT	1
6" (150mm)	WASHER SPL KIT	1


FLEXTRAY™ - Installation

90° Horizontal Bends (Short Radius)

- Make your own field cut horizontal bends using CLEANSHEAR™ to make safe, smooth cuts
- Can be made from any tray width and depth with any available finish
- SUPT WASHER & FTHDWE 1/4 hardware may be used on bottom of tray instead of WASHER SPL KIT where desired


16" (400mm) Tray Width

Flextray Depth	Required Hardware Description	Quantity
2" (50mm)	WASHER SPL KIT	3
4" (100mm)	WASHER SPL KIT	3
6" (150mm)	WASHER SPL KIT	3

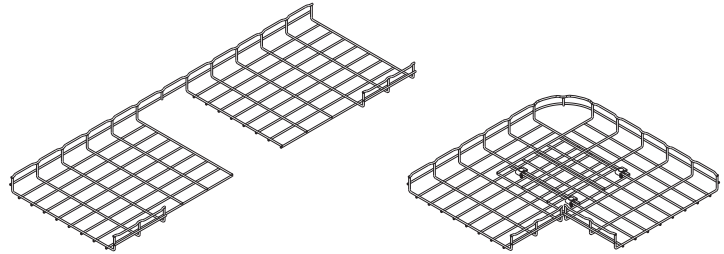


18" (450mm) Tray Width

Flextray Depth	Required Hardware Description	Quantity
2" (50mm)	WASHER SPL KIT	3
4" (100mm)	WASHER SPL KIT	3
6" (150mm)	WASHER SPL KIT	3

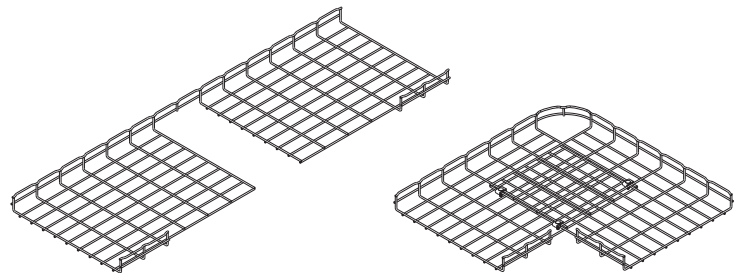


20" (500mm) Tray Width

Flextray Depth	Required Hardware Description	Quantity
2" (50mm)	WASHER SPL KIT	3
4" (100mm)	WASHER SPL KIT	3
6" (150mm)	WASHER SPL KIT	3

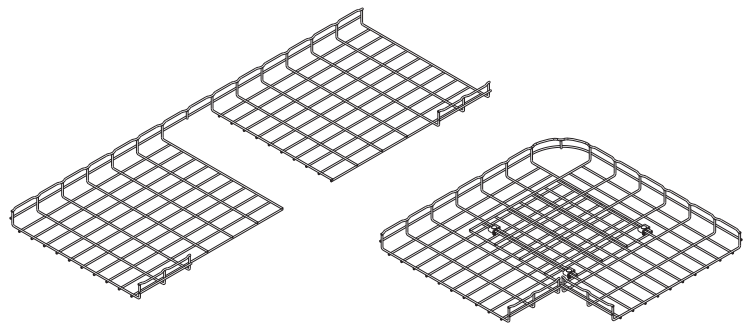


24" (600mm) Tray Width

Flextray Depth	Required Hardware Description	Quantity
2" (50mm)	WASHER SPL KIT	3
4" (100mm)	WASHER SPL KIT	3
6" (150mm)	WASHER SPL KIT	3

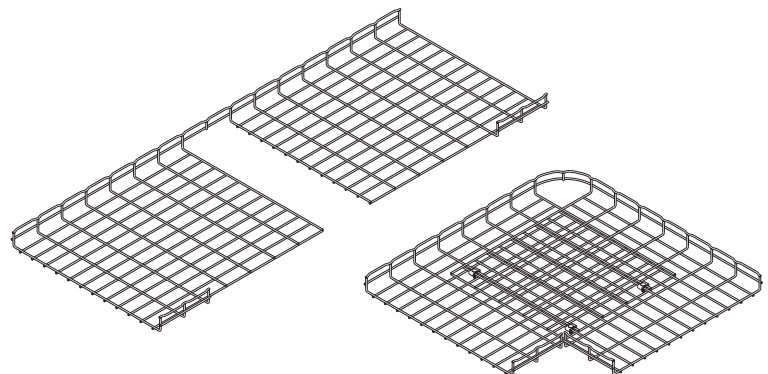

90° Horizontal Bends (Long Radius)


- Make your own field cut horizontal sweeps using CLEANSHEAR™ to make safe, smooth cuts
 - Can be made from any tray width and depth with any available finish
 - Cut as many segments as required to control sweep radius (use chart for recommendations)
 - One (1) WASHER SPL KIT is required to connect each cut segment minus one, this segment uses one (1) SPLICE BAR, two (2) FTHDWE 1/4 and two (2) BTM WASHER
- Illustration shown below is for a 8" (200mm) width
 - 1.5" deep FLEXTRAY has only one (1) side wire
 - 2" deep FLEXTRAY has two (2) side wires - shown
 - 4" deep FLEXTRAY has three (3) side wires
 - 6" deep FLEXTRAY has four (4) side wires

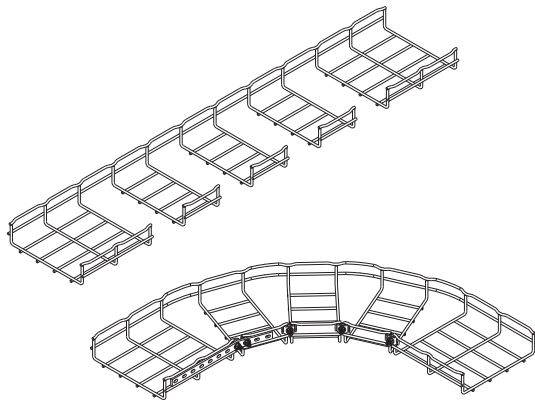

Flextray Width	Segments To Be Removed	Component Qty.		
		WASHER SPL KIT	FTHDWE 1/4 & BTM WASHER	SPLICE BAR
4" (100mm)	2	1	2	1
6" (150mm)	3	2	2	1
8" (200mm)	4	3	2	1
12" (300mm)	6	5	2	1
16" (400mm)	7	6	2	1
18" (450mm)	8	7	2	1
20" (500mm)	10	9	2	1
24" (600mm)	11	10	2	1
30" (750mm)	13	12	2	1
32" (800mm)	13	12	2	1

90° Horizontal Bend From (2) Straight Sections


- Cut required number of wire side sections listed in chart per the illustration below (Illustration is for a 8" (200mm) width)
- 1.5" deep FLEXTRAY has only one (1) side wire
- 2" deep FLEXTRAY has two (2) side wires - shown
- 4" deep FLEXTRAY has three (3) side wires
- 6" deep FLEXTRAY has four (4) side wires

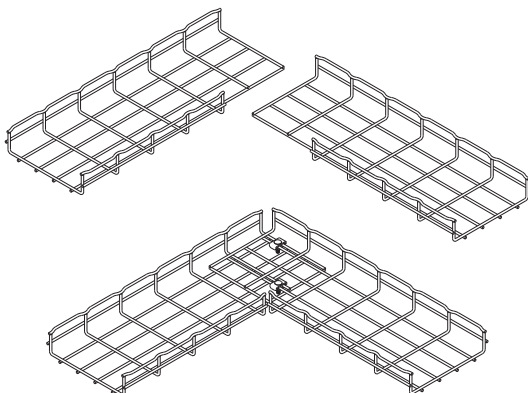

Flextray Width	Side Sections To Be Removed	WASHER SPL KIT Qty.
4" (100mm)	1	2
6" (150mm)	2	2
8" (200mm)	2	2
12" (300mm)	3	2
16" (400mm)	4	3
18" (450mm)	5	3
20" (500mm)	5	3
24" (600mm)	6	4
30" (750mm)	8	4
32" (800mm)	8	4

Reducers


Large Flextray Width	WASHER SPL KIT		Component Qty. FTHDWE 1/4 & BTM WASHER		SPLICE BAR	
	(SR)	(LRR)	(SR)	(LRR)	(SR)	(LRR)
4" (100mm)	-	1	-	2	-	1
6" (150mm)	-	2	-	2	-	1
8" (200mm)	1	2	4	2	2	1
12" (300mm)	2	3	4	2	2	1
16" (400mm)	2	3	4	2	2	1
18" (450mm)	2	3	4	2	2	1
20" (500mm)	3	3	4	2	2	1
24" (600mm)	3	3	4	2	2	1
30" (750mm)	3	3	4	2	2	1
32" (800mm)	3	3	4	2	2	1

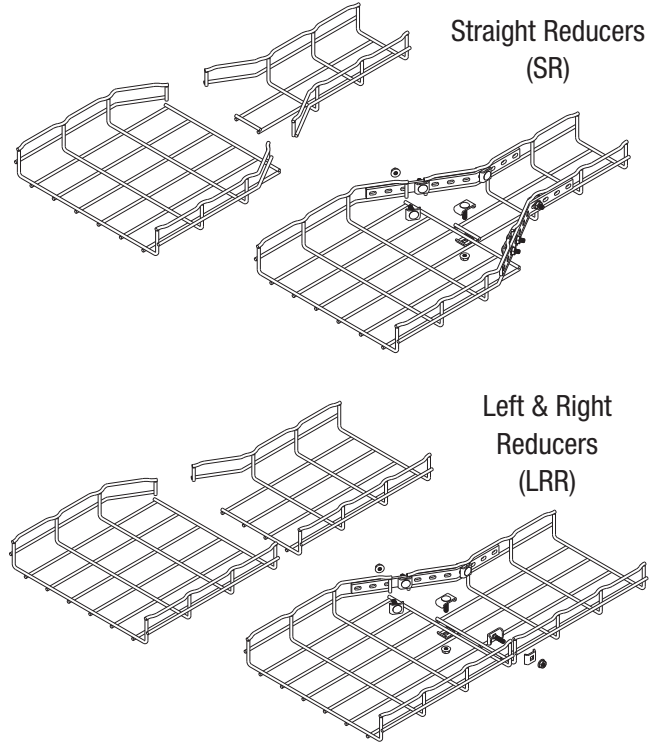

- 1.5" deep FLEXTRAY has only one (1) side wire
- 2" deep FLEXTRAY has two (2) side wires - shown
- 4" deep FLEXTRAY has three (3) side wires
- 6" deep FLEXTRAY has four (4) side wires


Vertical Inside & Outside Bends

- Cut wire section as shown and bend to desired angle
- 1.5" deep FLEXTRAY has only one (1) side wire
- 2" deep FLEXTRAY has two (2) side wires - shown
- 4" deep FLEXTRAY has three (3) side wires
- 6" deep FLEXTRAY has four (4) side wires

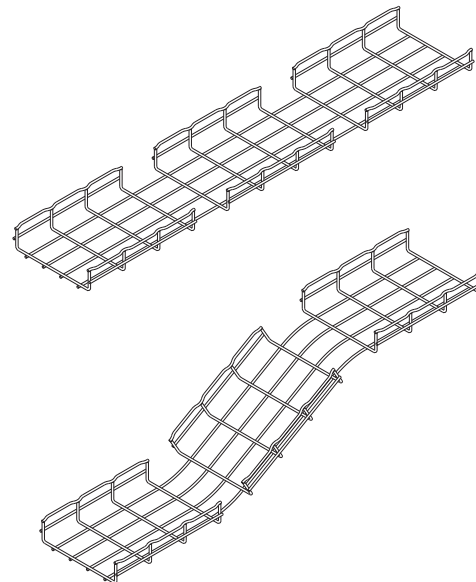

Horizontal Tees (and crosses)

- Cut wire side sections as shown in the illustration below (Illustration is for a 8" (200mm) width)
- 1.5" deep FLEXTRAY has only one (1) side wire
- 2" deep FLEXTRAY has two (2) side wires - shown
- 4" deep FLEXTRAY has three (3) side wires
- 6" deep FLEXTRAY has four (4) side wires
- For crosses, duplicate process on opposite side

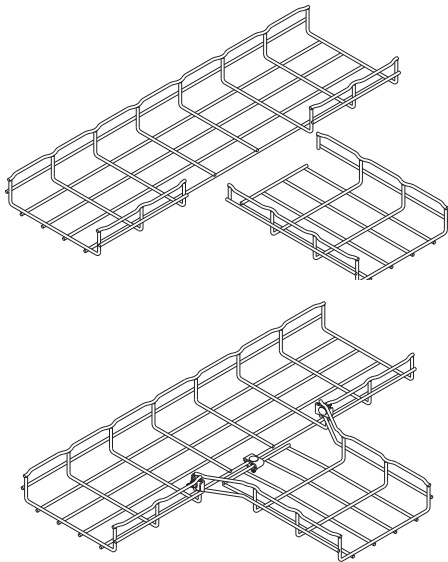

Flextray Width	WASHER SPL KIT Qty.
2" (50mm)	2
4" (100mm)	2
6" (150mm)	3
8" (200mm)	3
12" (300mm)	4
16" (400mm)	4
18" (450mm)	4
20" (500mm)	4
24" (600mm)	4
30" (750mm)	5
32" (800mm)	5